

### Installation Instructions

**IMPORTANT :** This fixture is designed for use with low voltage landscape power systems and T4 GY6.35 Bi-Pin lamps (maximum 50 watts).

**WARNING:**

This fixture must be installed in accordance with the National Electric Code and local code specifications. Failure to follow these codes and installation instructions will void the warranty and may result in serious injury and/or damage to the fixture. When using multiple fixtures, do not exceed the total wattage load as specified by the transformer rating. This product is designed for above ground installation only. Keep these installation instructions for future use.

**IMPORTANT SAFETY WARNINGS:**

This fixture and its lamp may become very hot, very quickly. Turn the fixture off and give it sufficient time to cool before handling the fixture or the lamp. Do not touch a hot lamp, lens, or surrounding housing until it has cooled. Maintain a safe distance between the lamp and combustible items. Oil from the skin may damage/reduce the lamp's effectiveness. Do not handle the lamp with bare hands - always use a cloth when handling the lamp. Install the fixtures no less than ten feet (3.05m) from pools, spas, or fountains to minimize risk of electric shock. Always use UL listed wire and wire connectors for connections.

**LAMP INSTALLATION/REPLACEMENT INSTRUCTIONS**

- 1) Prior to installing or servicing this product, disconnect the transformer from the main power supply.
- 2) Loosen the two hood screws and remove the hood from the fixture.
- 3) Insert a T4 lamp (maximum 50 watts) into the lamp socket.
- 4) Replace the hood and tighten the hood screws.


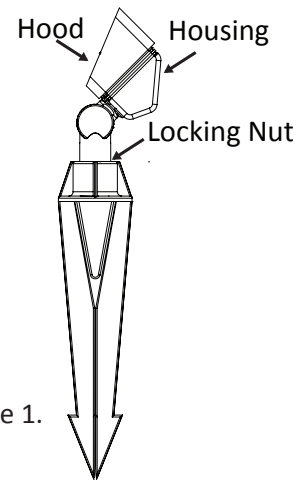


Figure 1.

**IF THE FIXTURE IS NOT YET INSTALLED, PROCEED WITH FIXTURE MOUNTING INSTRUCTIONS BELOW.**

Reminder: To prevent damage to the lamp, do not handle the lamp with bare hands. Do not operate the fixture with the lamp exposed.

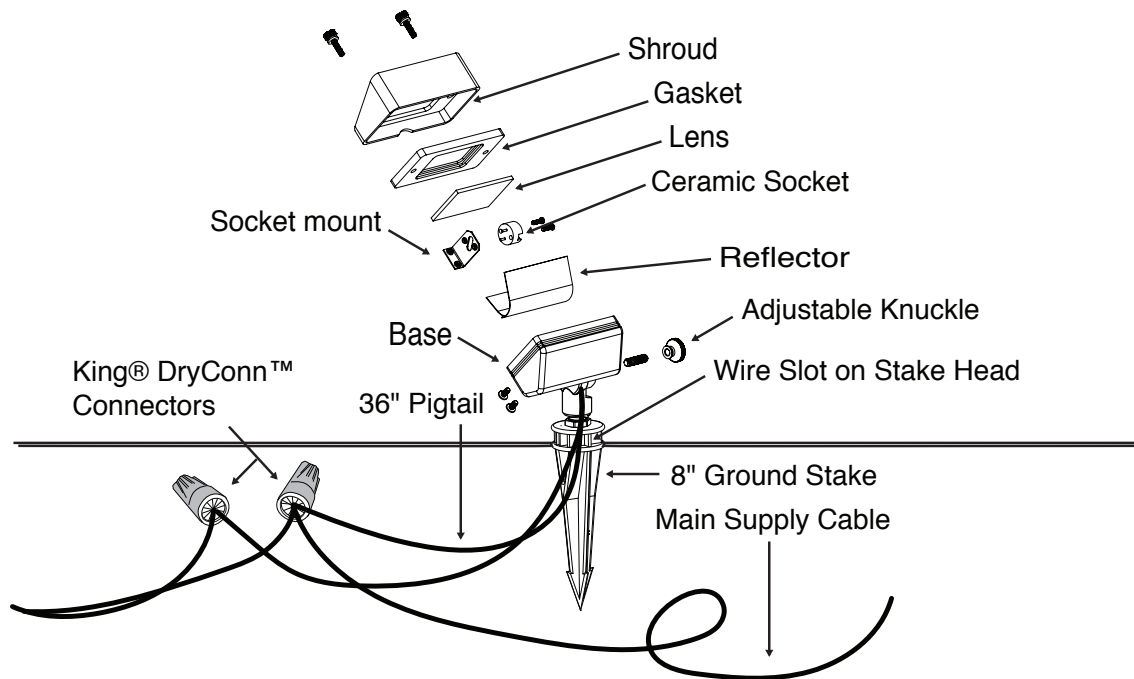

### FIXTURE MOUNTING INSTRUCTIONS

- 1) Prior to installing or servicing this product, disconnect the transformer from the main power supply.
- 2) Insert the pigtail wires from the bottom of the fixture through the hole and slot located on the head of the mounting stake.
- 3) Screw the fixture into the mounting stake hole. Secure the fixture in the desired position by tightening the locking nut.

**CAUTION: Do not exceed maximum wattage marked on luminaire label.**

**NOTE: DO NOT touch lamp with bare hands. Use soft cloth to handle lamp.**

- 4) Place the fixture/stake in the desired location. Insert the stake into the ground in the desired location until the bottom of the stake head rests on the ground surface.
- 5) Install shield with lens to lamp holder by aligning locking pins on both of them. Be sure to position the shield with lens properly in place.
- 6) Strip the two fixture pigtail wires. Attach the two fixture leads to the two main supply cable leads using the two provided King® DryConn™ waterproof connectors. Please note that the fixture wiring should be buried no deeper than six inches to ensure connectivity to the main supply cable.
- 6) Using a Phillips head screwdriver, loosen the screw located in the knuckle. Angle the fixture to the desired position and retighten the screw.
- 7) Reconnect the transformer to the main power supply. Turn on the power to the fixture and verify proper position and operation.
- 8) Reverse Step 2 - Step 3 to expose the lamp and replace it with correct wattage and type marked on luminaire label. Reinstall shield with lens.

**IMPORTANT: Halogen lamps must be protected from moisture and dust at all times. Always re-install shield with lens when moved.**

Note: In hard soil, the mounting stake can be inserted into the ground using a hammer, prior to attaching the fixture .

### LED INSTALLATIONS

Halco JC Series ProLED lamps have an operating voltage range of 10-18 volts AC. Operating JC Series ProLED lamps with voltage greater than 18V may damage the internal components of the LED and voids the manufacturer warranty. ProLED lamps maintain light output, full color, and instant start capabilities to temperatures down to -20 degrees Celsius. JC Series ProLED lamps will operate at the desired light output with voltage as low as 10V and as high as 18V, providing balanced light output from the fixture located closest to the transformer to the fixture located furthest from the transformer.