

CPSC Maintenance Menu Instructions


Changing the Model Selection

To change the CPSC Model settings, the technician / pool owner will have to access the maintenance menu.

To access the maintenance menu and change the settings follow the procedure below:


Step 1:

Connect the Control Unit to mains power. Ensure that the unit is turned on. This is done with the on/off button. The POWER ON LED will come on when the Control Unit is turned on.

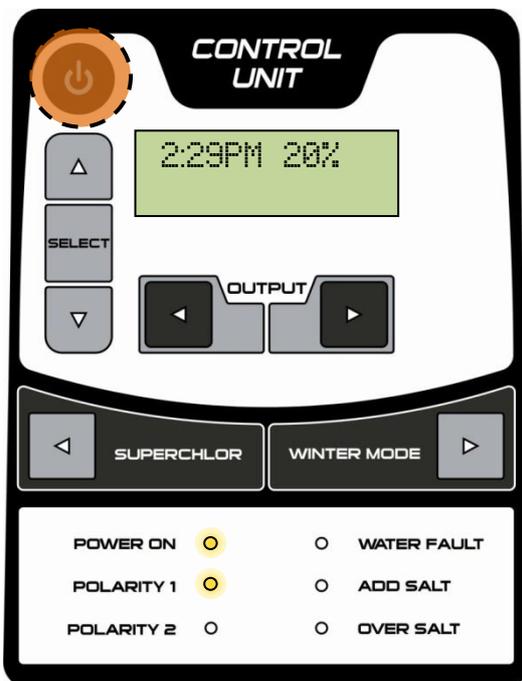


Step 2:

Re-connect the mains power. As soon as the "COMPUPOOL ULTRAKLEEN" screen comes on simultaneously press the SUPERCHLOR and WINTER MODE buttons for 10 seconds. Release the buttons and the "MAINTENANCE MENU" will be activated. All LED's will light up during this process.

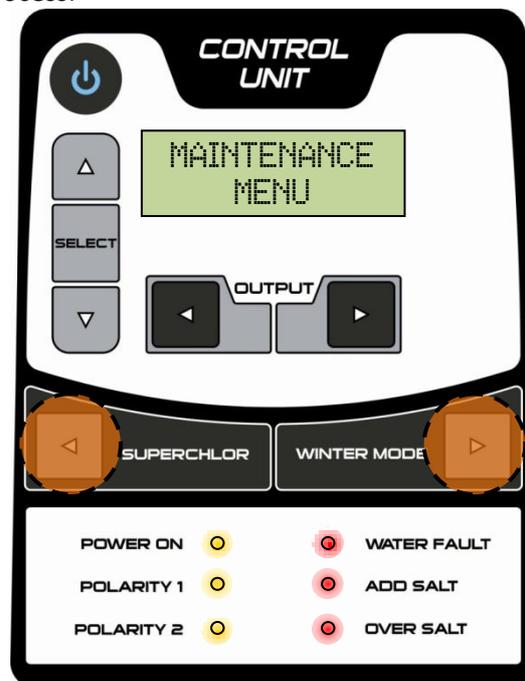


Step 3:

Scroll through the "MAINTENANCE MENU" by pressing the SELECT BUTTON. Press this button once to access the "LOAD" (Model Selection) setting.

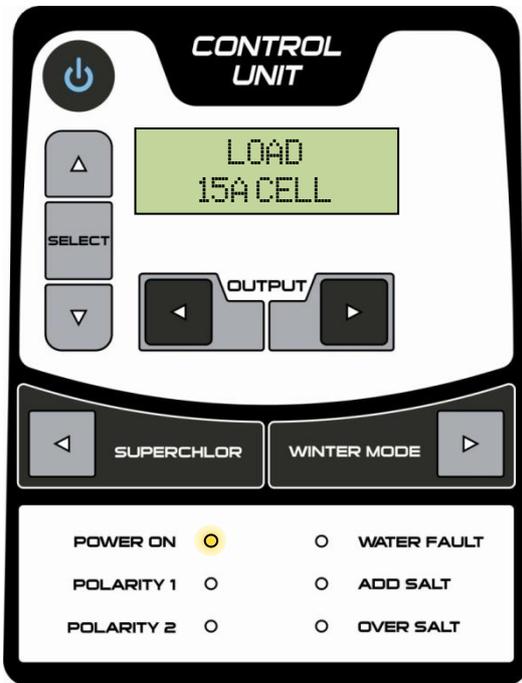


Step 4:

To change the "LOAD" settings press the up ▲ and ▼ symbols. There are four options for the "LOAD" setting - 7.5A (CPSC08), 15A (CPSC16), 20A (CPSC24), and 30A (CPSC36 and CPSC48). NOTE: The 30A setting requires a larger transformer than the smaller models.

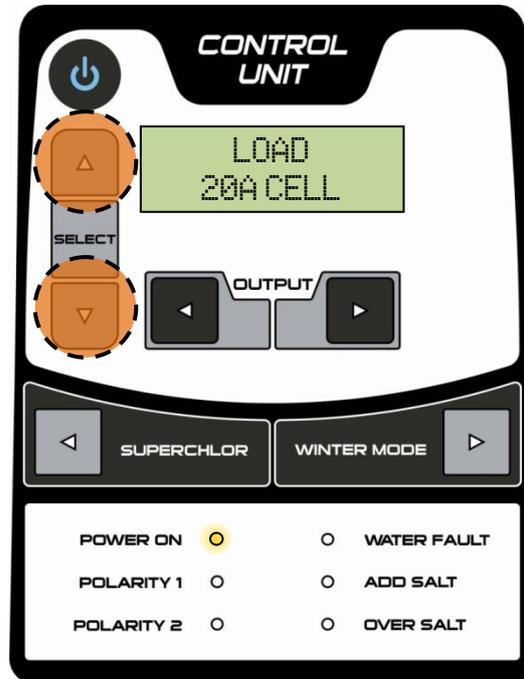

Step 5:

Once the chosen "LOAD" setting has been selected scroll through the "MAINTENANCE MENU" by pressing the SELECT BUTTON until the "TURN MAINS OFF THEN ON" screen is reached.

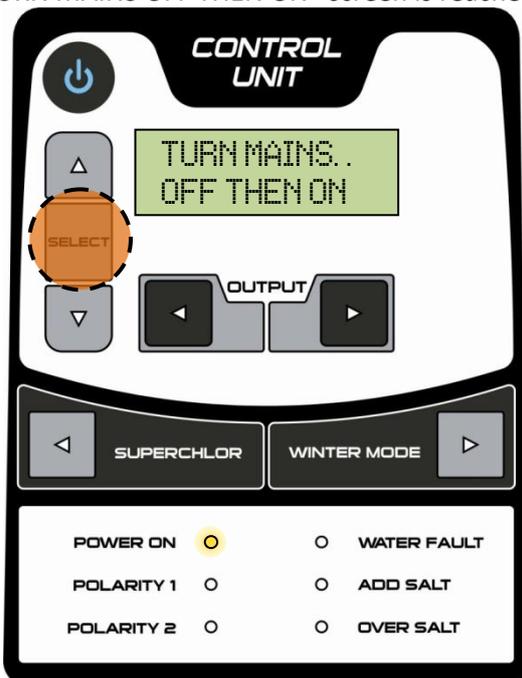

Step 6:

Now disconnect and reconnect the mains power and the adjusted "MAINTENANCE MENU" parameters will be stored.

