



# The Heart of Your Pool System

Stealth™ is a professional-grade pump that provides superior performance and energy-saving efficiency. Stealth is designed for ease of installation and trouble-free maintenance, and is our most efficient single- and two-speed pump available.

### • High Performance

Compliant single-speed and 3-Phase models available

### • Low Maintenance

The largest smooth surface trap basket on the market for reduced maintenance

### User-Friendly

Includes ergonomic handles and easy to read indicators

#### Less Noise

"Quiet Technology" design for whisper-soft operation

### · Cost-Saving Efficiency

E-Plus energy-efficient motor saves on energy costs

### Easy to Install

Comes equipped with 2"x 2 1/2" quick-connect unions (2 1/2"x 3"unions on 5HP models)


### • Commercial Applications

Single-Phase and Three-Phase models available for commercial applications. Model SHPF5.0-3PH features a Totally Enclosed, Fan-Cooled (TEFC) motor design.



Model SHPF5.0-3PH with TEFC motor

## **DIMENSIONS**



### **SPECIFICATIONS**

### Residential Stealth Pumps, DOE Compliant

Model Number	THP	WEF	Voltage	Amps	Recommended Pipe Size	Carton Weight	Length A
SHPF.50 SHPM 75	0.95	3.6	208-230/115	4.5-4.4/8.8	2"-2 1/2"	30 lbs.	29"

### Commercial 1-Phase Stealth Pumps, DOE Compliant<sup>1</sup>

Model Number	THP	WEF	Voltage	Amps	Recommended Pipe Size	Carton Weight	Length A
SHPF5.0	5.00	_	208-230	21.0 - 19.4	4"	68 lbs.	31 1/2"

### Commercial 3-Phase Stealth Pumps, DOE Compliant


Model Number	THP	WEF	Voltage	Amps	Recommended Pipe Size	Carton Weight	Length A
SHPF1.0-3PH	1.65	2.7	208-230/460	5.0-4.6/2.3	2"-2 1/2"	55 lbs.	29 3/4"
SHPF1.5-3PH	2.21	2.6	208-230/460	6.4-5.8/2.9	2"-2 1/2"	57 lbs.	30"
SHPF2.0-3PH	2.60	2.5	208-230/460	7.1- 6.8/3.4	2"-2 1/2"	64 lbs.	30 1/2"
SHPF3.0-3PH	3.45	2.1	208-230/460	9.0-8.6/4.3	2 1/2"-3"	62 lbs.	31 1/2"
SHPE5.0-3PH <sup>2</sup>	5.75	1.8	208-230/460	15.5-15.0/7.5	4"	95 lbs.	35"

### Residential Stealth Pumps, Not DOE Compliant<sup>3</sup>

Model Number	THP	WEF	Voltage	Amps	Recommended Pipe Size	Carton Weight	Length A
SHPF.75 SHPM1.0	1.25	-	208-230/115	6.0-5.6/11.2	2"-2 1/2"	43 lbs.	29 3/4"
SHPF1.0 SHPM1.5	1.65	-	208-230/115	7.8-7.4/14.8	2"-2 1/2"	45 lbs.	30"
SHPF1.5 SHPM2.0	2.21		208-230	9.6-8.8	2"-2 1/2"	50 lbs.	30 1/2"
SHPF2.0 SHPM2.5	2.60	-	208-230	11.0-10.0	2"-2 1/2"	57 lbs.	31"
SHPF1.0-2 SHPM1.5-2	1.65	-	230	7.2/3.0	2"-2 1/2"	50.4 lbs.	30"
SHPF1.5-2 SHPM2.0-2	2.21	-	230	10.0/3.5	2"-2 1/2"	57 lbs.	30 1/2"
SHPF2.0-2 SHPM2.5-2	2.60	-	230	11.0/4.0	2"-2 1/2"	64 lbs.	31"
SHPF3.0	3.45	-	208-230	15.0-13.6	3"	62 lbs.	31"

<sup>1</sup> Exempt from DOE DPPP enforcement

### **PERFORMANCE**

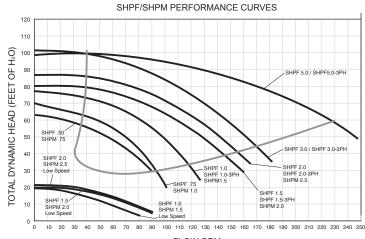

FLOW GPM





 $<sup>^{\</sup>rm 2}\,$  Model SHPF5.0-3PH features a Totally Enclosed, Fan-Cooled (TEFC) motor design.

<sup>&</sup>lt;sup>3</sup> Pumps not meeting DOE compliance standards will cease manufacturing on or before July 18, 2021. Specifications are being provided for historical reference.