

FEATURES:

- Intake 1 ½" Union threads / 1 ½" FPT
- Discharge 2" Union threads / 1 1/2" FPT
- Large 6" pump trap with 2-piece lid
- Powerful side discharge performance
- Wet end rotates for easy installation

ABOVE GROUND POOL PUMP

The Hi-Flo 48-Frame Above Ground Pump was designed for superior and efficient performance. This pump features high flow rate performance for faster filtering cycles. The Hi-Flo is ideal for new systems or as a replacement pump.














1 Clear lid lets you see when basket needs cleaning 2 Extra large basket extends time between cleanings 3 Double-threaded: inside for fittings, outside for unions 4 Split-nut for easy servicing 5 Impeller design provides excellent pressure performance and high volume output for optimum flow 3 Heavy-duty, high performance motor for maintenance-free operation 7 Durable corrosion-proof housing made of fiberglass filled resin for years of dependable service and all-weather performance

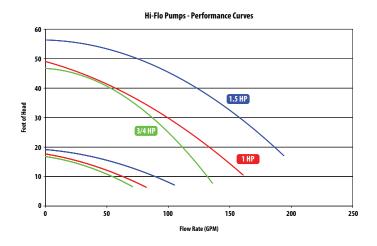

Hi-Flo II 48-Frame Pump & Trap

Part No.	Description	Volts	HP
PH1075-3	1-Speed - 3 ft. Twist-Lock Cord	115	3/4
PH1100-3	1-Speed - 3 ft. Twist-Lock Cord	115	1.0
PH1150-3	1-Speed - 3 ft. Twist-Lock Cord	115	1.5
PH1200-3	1-Speed - 3 ft. Twist-Lock Cord	115	2.0
PH2075-3	2-Speed - 3 ft. Twist-Lock Cord	115	3/4
PH2100-3	2-Speed - 3 ft. Twist-Lock Cord	115	1.0
PH2150-3	2-Speed - 3 ft. Twist-Lock Cord	115	1.5
PH2200-3	2-Speed - 3 ft. Twist-Lock Cord	115	2.0
PH1075-6	1-Speed - 6 ft. NEMA Cord	115	3/4
PH1100-6	1-Speed - 6 ft. NEMA Cord	115	1.0
PH1150-6	1-Speed - 6 ft. NEMA Cord	115	1.5
PH1200-6	1-Speed - 6 ft. NEMA Cord	115	2.0
PH2075-6	2-Speed - 6 ft. NEMA Cord	115	3/4
PH2100-6	2-Speed - 6 ft. NEMA Cord	115	1.0
PH2150-6	2-Speed - 6 ft. NEMA Cord	115	1.5
PH2200-6	2-Speed - 6 ft. NEMA Cord	115	2.0

Part numbers listed are for discharge in the vertical position (sand). For discharge in the horizontal position (cartridge & D.E.), add "R" to the end of the part number.



