




The BQ 1 LED stainless steel light illuminates grilling areas. It is designed to work with the Luxor® system, or it can be operated independently with an optional plug-in transformer.

BQ: Barbeque Light

NUMBER OF LEDs:	1
HALOGEN LUMEN OUTPUT EQUIVALENT:	10 Watt
USEFUL LED LIFE (L70):	50,000 hrs avg
INPUT VOLTAGE:	10 to 15V
VA TOTAL: (Use to size the lighting controller)	2.4
WATTS USED:	2.0
LUMENS PER WATT (EFFICACY)	42
MAX LUMENS:	81.5
CRI (Ra)	82

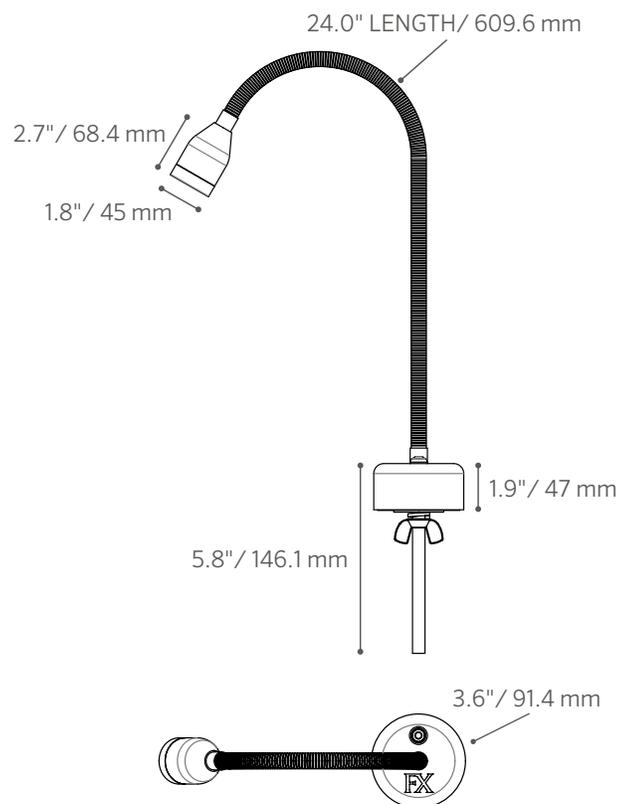



BQ: Barbeque Light

FACTORY INSTALLED OPTIONS: Order 1 + 2 (optional) + 3 + 4

Step	Description	Code
1	FIXTURE	BQ
2	OPTIONAL ZD	ZD (Refer to the Luxor page in the Lighting Control section)
3	LAMP	1LED (50,000 avg. life hours)
4	FINISH	SS

EXAMPLE: BQ-ZD-1LED-SS = BQ - ZD Option - 1LED Board - Stainless Steel

METALS




SS = Stainless Steel

FIELD INSTALLED OPTIONS:

PART NUMBER	DESCRIPTION
MT12W	MINI TRANSFORMER, 12W

PHOTOMETRICS:

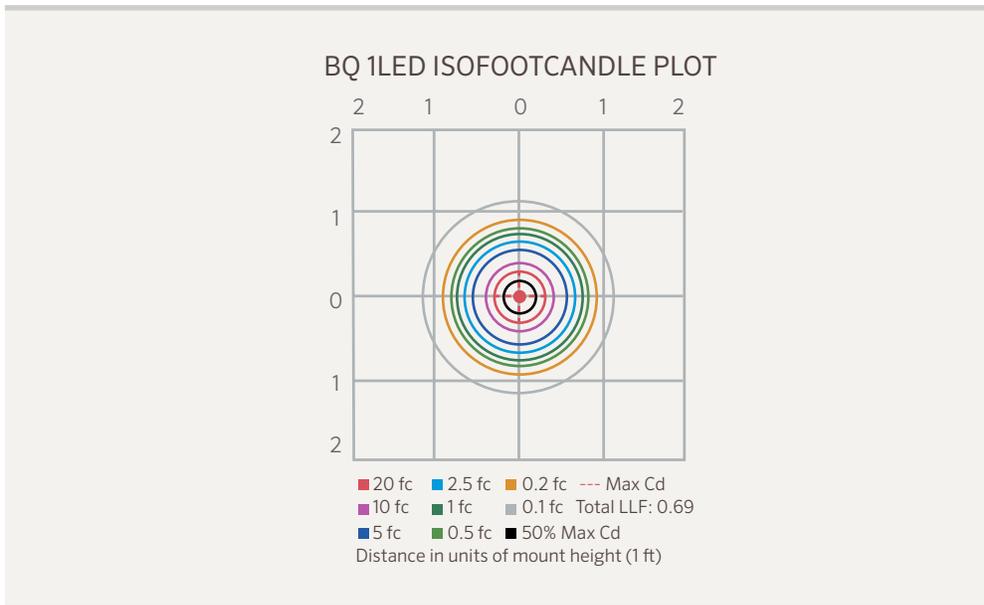

The BQ includes a 1 LED board, mounting hardware for countertop, and a 2 ft lead.

Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum. It is calculated using LM-79 method for SSL Luminaires.