

# System:2 Mod Media™

## PLM Series Aboveground Systems

by Sta-Rite




## Greatest capacity for least maintenance

The System:2 Mod Media system from Sta-Rite is the ultra-capacity filter ideally suited for aboveground pools. The Mod Media system handles dirt loads up to 15 times greater than sand filters of equivalent size. Balanced flow tank hydraulics direct water through each side of the filter module for uniform dirt loading. This prevents clogging and captures more dirt between cleanings to minimize maintenance time.

You may go an entire season before you need to clean your PLM aboveground filter.

- You won't clean often, but it's easy when you do—just rinse in place with a garden hose.
- Quiet, highly efficient pump options keep operating costs low.
- Compact design fits easily in tight installations.

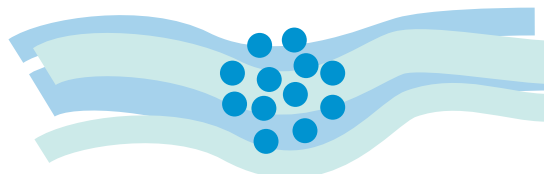

*The Mod Media system strips away particles as small as 20 microns (an average grain of beach sand is 100 to 2000 microns in diameter!).*

# System:2 Mod Media™

## PLM Series Aboveground Systems



- Top-mounted pressure gauge and information panels are positioned for easy reading
- Split tank design permits rinse-in-place cleaning—super simple to achieve thorough cleaning fast
- Posi-Ring® Closure is easy to secure every time and lasts for years
- System available with Sta-Rite® OptiFlo® Series aboveground pumps



## Spray-and-go simplicity



The System:2 Mod Media system features a one-piece filter module that simply drops into the easily accessible tank. It's foolproof! When cleaning is necessary, just remove the lid (no tools are needed) and spray-rinse the module while it is still in place.\* It only takes minutes to clean thoroughly and get back into service fast.

### Convenience and versatility

The Mod Media systems small diameter footprint is the perfect fit for new and retrofit installations. Interchangeable ports provide multiple plumbing options and the modular filter tank permits quick change of filter media. Contemporary styling and matte black finish appear attractive in any pool setting.

\*Modules used in conjunction with certain pool/spa sanitizers may require soaking in special cleaning solutions.

## Filter Performance

Model	Pump (HP)	Filter Area (Sq. Ft.)	For Pools up to (Gal.) 8 Hr. Turnover
SRPLM100OE	1	100	48,000
SRPLM100OF	1.5	100	48,000
SRPLM150OE	1	150	72,000
SRPLM150OF	1.5	150	72,000

**Operating Limits** – Maximum continual operating pressure is 50 PSI. For Pool/Spa (bather) applications, the maximum operating water temperature within the filter is 104°F (40°C).

Note: Turnover capacity based on filter

## Available from:



**Simply Smarter.**

[www.staritepool.com](http://www.staritepool.com)  
Phone: 800-831-7133



pumps / filters / heaters / heat pumps / automation / lighting / cleaners / sanitizers / water features / maintenance products

All Pentair trademarks and logos are owned by Pentair or one of its global affiliates. Sta-Rite®, OptiFlo®, System:2 Mod Media™ and Posi-Ring® are trademarks and/or registered trademarks of Pentair Water Pool and Spa, Inc. and/or its affiliated companies in the United States and/ or other countries. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.