

# 32" PINHOLE ANTI-ENTRAPMENT SUCTION OUTLET COVER AND MANUFACTURED ABS SUMP



Certified to  
NSF/ANSI/CAN 50  
ANSI/APSP/ICC-16 2017

Open Area  
13.46 in<sup>2</sup>

For SOFA Specific Flow Ratings and  
specifications please scan QR code or visit  
[www.aquastarpoolproducts.com/flowcode](http://www.aquastarpoolproducts.com/flowcode)



## FEATURES

Certified, Listed, and Labeled in conformance with APSP/ANSI/ICC-16 2017 and NSF/ANSI/CAN 50 standards

Retrofits over any existing sump up to 10" round

No need for a secondary drain or SVRS, unblockable drain and sump assembly

Manufactured from superior UV-resistant engineered polymers  
Individually boxed

Online product support including downloadable General Certificate of Conformity, third-party certificate, installation instructions and more

Replace drain cover every five years from the date of installation

6 per case

U.S. Patent No. D663387

## Unblockable Propeller Drain<sup>®</sup>

No additional sump required





Note: Propeller Sump must be permanently affixed to pool floor using epoxy and provided anchors to be considered unblockable

Part # 32PDxxx

### STANDARD COLORS

-  32PD101 – White
-  32PD102 – Black
-  32PD103 – Light Gray
-  32PD105 – Dark Gray
-  32PD108 – Tan

Also available cover only without sump/frame, p/n 32CDPHNFxxx  
40 per case

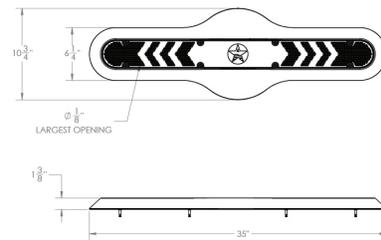

1. 32" Propeller Sump
2. 32" Channel Drain Pinhole Cover
3. 1/4" Concrete Anchor, Qty 8
4. 10 x 1" Pan Head Phillips, 316 SS, Qty 10 (2 Optional)
5. 10 x 3/4" Flat Head Phillips, 316 SS, Qty 8

NOTE: USE 1/4" MASONRY DRILL BIT.  
OPTIONAL: BIK4 "BRASS ANCHOR KIT"

P 877-768-2717 F 877-276-POOL Outside the US: P +1-949-336-1940 F +1-949-336-1940  
info@aquastarpoolproducts.com www.aquastarpoolproducts.com