

# How to Buckle a Standard Spring:



Begin with a strap, a buckle, and a standard spring. The buckle should sit with the ridges facing up.



Insert the strap, from the bottom, into the first section of the buckle.




Weave the strap into the middle section of the buckle.




Slide on the triangle end of the spring. Make sure the hooks of the spring are facing up, so they don't scrap on the concrete.



Weave the strap back through the middle section.

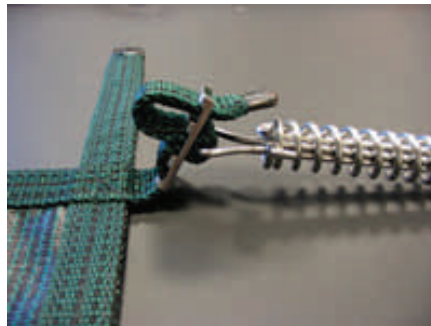

Weave the strap through the last section.

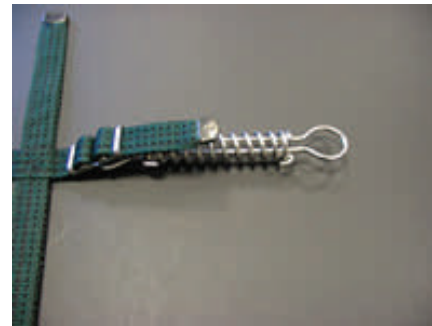

Pull tight! Make adjustments to the strap as needed.