




*The CV is a soft, efficient, and safe path light that can be used for pathways of all shapes, sizes, and locations. Its rounded hat shape gives it a classic look that can improve the scheme of a diverse array of landscapes.*

### CV: Path Light

|   |                |                |
|---|----------------|----------------|
| NUMBER OF LEDS:                                     | 1              | 3              |
| HALOGEN LUMEN OUTPUT EQUIVALENT:                    | 10 Watt        | 20 Watt        |
| USEFUL LED LIFE (L70):                              | 50,000 hrs avg | 50,000 hrs avg |
| INPUT VOLTAGE:                                      | 10 to 15V      | 10 to 15V      |
| VA TOTAL: (Use this number to size the transformer) | 2.4            | 4.5            |
| WATTS USED:   | 2.0            | 4.2            |
| LUMENS PER WATT (EFFICACY)                          | 19.4           | 25             |
| MAX LUMENS:   | 39             | 103            |
| CCT (Ra)  | 86             | 66.6           |

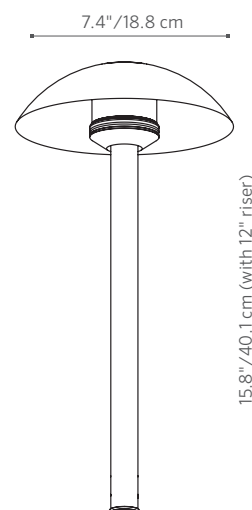



# CV: Path Light

### FACTORY INSTALLED OPTIONS (TOP ASSEMBLY): Order 1 + 2

| Step | Description  | Code  |
|------|--------------|---|
| 1    | TOP ASSEMBLY | CVLEDTA   |
| 2    | TOP FINISH   | AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, VF, SB, FB |

EXAMPLE: **CVLEDTA-BZ** = CV Top Assembly - Bronze Metallic Finish

### FACTORY INSTALLED OPTIONS (RISER ASSEMBLY): Order 1 + 2 (optional) + 3 + 4 + 5

| Step | Description  | Code   |
|------|--------------|--|
| 1    | RISER TYPE   | G  |
| 2    | OPTIONAL ZD  | ZD (Refer to the Luxor page in the Lighting Control section) |
| 3    | LAMP         | 1LED, 3LED (50,000 avg. life hours)                          |
| 4    | RISER HEIGHT | 8RA, 12RA, 18RA, 24RA, 36RA (in inches)                      |
| 5    | FINISH       | AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, VF, SB, FB        |


EXAMPLE: **G-ZD-3LED-12RA-BZ** = Riser Type - ZD Option - 3 LED Board - 12" Riser - Bronze Metallic Finish

### FIELD INSTALLED OPTIONS: Order Individually

| Mounting Options  |  |
|---|--|
| Long Slot Spike (250015840000) 2.5" x 10" <b>Included</b> ▶ |  |
| Super Slot Spike (753900) 2" x 10"                          |  |
| SuperJ-Box (SJ-XX**) 2.5" x 12"                             |  |
| Post Mount (PM-XX**) 2.5" x 13"                             |  |

EXAMPLE: **753900** = Super Slot Spike

### PHOTOMETRICS:

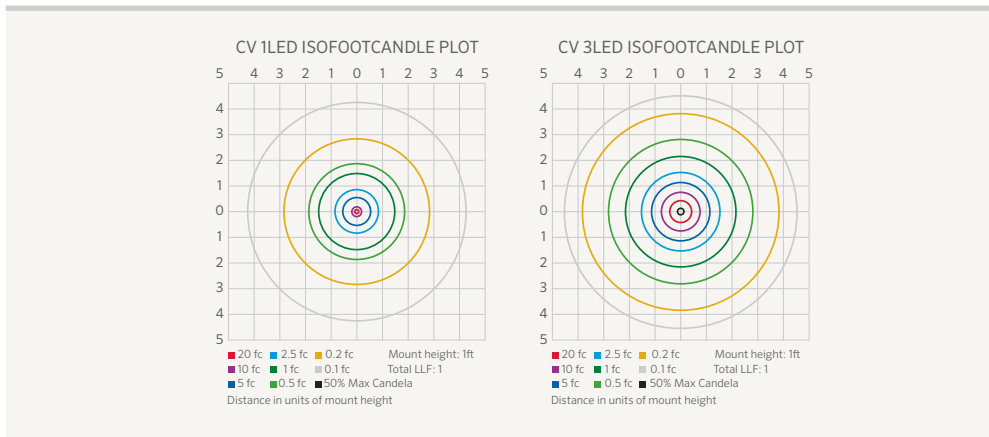

Beam angle is calculated using LM-79 method for SSL Luminaires:  
 "Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum."

### METALS

- AB** = Antique Bronze\* (On Copper)
- AT** = Antique Tumbled\* (On Copper)
- CU** = Copper
- NP** = Nickel Plate\*

### POWDER COAT

- WG** = White Gloss
- FW** = Flat White
- AL** = Almond
- BZ** = Bronze Metallic
- DG** = Desert Granite
- WI** = Weathered Iron
- VF** = Verde Speckle
- SB** = Sedona Brown
- FB** = Flat Black

All CV path lights come standard with amber, green, blue and frosted filters

The CV includes choice of LED board, riser size, finish, 5 ft. lead wire and Long Slot Spike.

**Note:** Only the copper portions of the path lights are powder coated. The brass pieces remain natural.

\* May require longer lead time  
 \*\* Denotes finish option