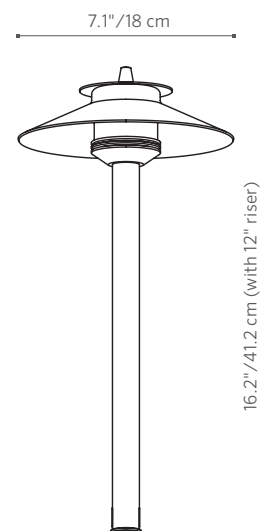




In shape, the DM is perhaps one of the most dynamic path lights ever invented. Sleek from top to bottom, and versatile with 1 or 3 LED, the DM is the perfect combination of form and function.

DM: Path Light

| | | |
|---|----------------|----------------|
| NUMBER OF LEDS: | 1 | 3 |
| HALOGEN LUMEN OUTPUT EQUIVALENT: | 10 Watt | 20 Watt |
| USEFUL LED LIFE (L70): | 50,000 hrs avg | 50,000 hrs avg |
| INPUT VOLTAGE: | 10 to 15V | 10 to 15V |
| VA TOTAL: (Use this number to size the transformer) | 2.4 | 4.5 |
| WATTS USED: | 2.0 | 4.2 |
| LUMENS PER WATT (EFFICACY) | 19.4 | 25 |
| MAX LUMENS: | 39 | 103 |
| CCT (Ra) | 86 | 66.6 |





DM: Path Light

FACTORY INSTALLED OPTIONS (TOP ASSEMBLY): Order 1 + 2

| Step | Description | Code |
|------|--------------|---|
| 1 | TOP ASSEMBLY | DMLEDTA |
| 2 | TOP FINISH | AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, VF, SB, FB |





EXAMPLE: **DMLEDTA-BZ** = DM Top Assembly - Bronze Metallic Finish

FACTORY INSTALLED OPTIONS (RISER ASSEMBLY): Order 1 + 2 (optional) + 3 + 4 + 5

| Step | Description | Code |
|------|--------------|--|
| 1 | RISER TYPE | G |
| 2 | OPTIONAL ZD | ZD (Refer to the Luxor page in the Lighting Control section) |
| 3 | LAMP | 1LED, 3LED (50,000 avg. life hours) |
| 4 | RISER HEIGHT | 8RA, 12RA, 18RA, 24RA, 36RA (in inches) |
| 5 | FINISH | AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, VF, SB, FB |

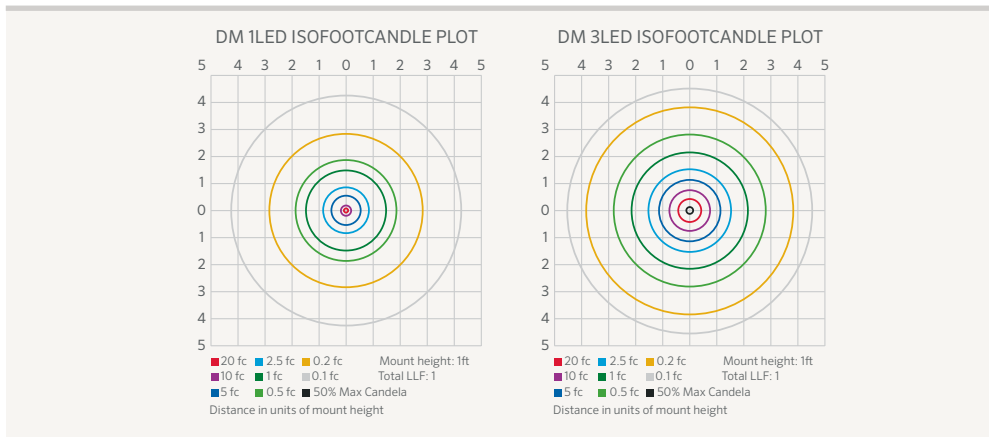
EXAMPLE: **G-ZD-3LED-36RA-BZ** = Riser Type - ZD Option - 3 LED Board - 36" Riser - Bronze Metallic Finish

FIELD INSTALLED OPTIONS: Order Individually

| Mounting Options | |
|---|--|
| Long Slot Spike (250015840000) 2.5" x 10" Included ▶ |  Long Slot Spike  Super Slot Spike  Super J-Box XX**  Post Mount XX** |
| Super Slot Spike (753900) 2" x 10" | |
| SuperJ-Box (SJ-XX**) 2.5" x 12" | |
| Post Mount (PM-XX**) 2.5" x 13" | |





EXAMPLE: **753900** = Super Slot Spike

PHOTOMETRICS:













Beam angle is calculated using LM-79 method for SSL Luminaires:
 "Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum."

METALS

-  **AB** = Antique Bronze* (On Copper)
-  **AT** = Antique Tumbled* (On Copper)
-  **CU** = Copper
-  **NP** = Nickel Plate*

POWDER COAT

-  **WG** = White Gloss
-  **FW** = Flat White
-  **AL** = Almond
-  **BZ** = Bronze Metallic
-  **DG** = Desert Granite
-  **WI** = Weathered Iron
-  **VF** = Verde Speckle
-  **SB** = Sedona Brown
-  **FB** = Flat Black

 All DM path lights come standard with amber, green, blue and frosted filters

The DM includes choice of LED board, riser size, finish, 5 ft. lead wire and Long Slot Spike.

Note: Only the copper portions of the path lights are powder coated. The brass pieces remain natural.

* May require longer lead time
 ** Denotes finish option