FXLuminaire.



In shape, the LED PF is one of the most dynamic and efficient path lights we carry. Its petite size and unique design make it the perfect solution to accentuate delicate paths in a wide variety of landscapes.

PF: Path Light

NUMBER OF LEDS:	1	
HALOGEN LUMEN OUTPUT EQUIVALENT:	10 Watt	
USEFUL LED LIFE (L70):	50,000 hrs avg	
INPUT VOLTAGE:	10 to 15V	
VA TOTAL: (Use this number to size the transformer)	2.4	
WATTS USED:	2.0	
LUMENS PER WATT (EFFICACY)	19.4	
MAX LUMENS:	39	
CCT (Ra)	86	





PF: Path Light

FACTORY INSTALLED OPTIONS (TOP ASSEMBLY): Order 1 + 2

Step	Description	Code
1	TOP ASSEMBLY	PFLEDTA
2	TOP FINISH	AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, VF, SB, FB

EXAMPLE: PFLEDTA-WI = PF Top Assembly - Weathered Iron Finish

FACTORY INSTALLED OPTIONS (RISER ASSEMBLY): Order 1 + 2 (optional) + 3 + 4 + 5

Step	Description	Code
1	RISER TYPE	P
2	OPTIONAL ZD	ZD (Refer to the Luxor page in the Lighting Control section)
3	LAMP	1LED (50,000 avg. life hours)
4	RISER HEIGHT	8RA, 12RA, 18RA, 24RA, 36RA (in inches)
5	FINISH	AB*, AT*, CU, NP*, WG, FW, AL, BZ, DG, WI, VF, SB, FB


EXAMPLE: P-ZD-1LED-18RA-WI = Riser Type - ZD Option - 1 LED Board - 18" Riser - Weathered Iron Finish

FIELD INSTALLED OPTIONS: Order Individually

Mounting Options		-		w
Long Slot Spike (250015840000) 2.5" x 10" Included	V		V	
Super Slot Spike (753900) 2" x 10"				
SuperJ-Box (<i>SJ-XX**</i>) 2.5" x 12"	₩	₩	₩	
Post Mount (<i>PM-XX**</i>) 2.5" x 13"	Long Slot Spike	Super Slot Spike	Super J-Box XX**	Post Mount XX**

EXAMPLE: 7539000 = Super Slot Spike

PHOTOMETRICS:

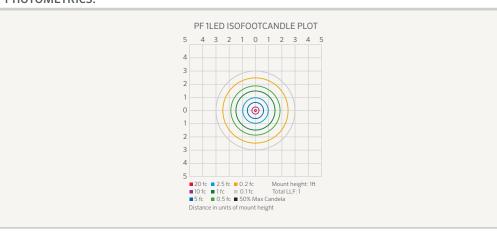

Beam angle is calculated using LM-79 method for SSL Luminaires:

METALS



AB = Antique Bronze* (On Copper)



AT = Antique Tumbled* (On Copper)



 $\mathbf{CU} = \mathsf{Copper}$



NP = Nickel Plate*

POWDER COAT



WG = White Gloss



FW = Flat White



AL = Almond



BZ = Bronze Metallic





DG = Desert Granite



WI = Weathered Iron





VF = Verde Speckle



SB = Sedona Brown



FB = Flat Black



All PF path lights come standard with amber, green, blue and frosted filters

The PF includes a 1LED board, and choice of riser size and finish, 5 ft. lead wire and Long Slot Spike.

Note: Only the copper portions of the path lights are powder coated. The brass pieces remain natural.

 $[&]quot;Beam \, angle \, is \, defined \, as \, two \, times \, the \, \, vertical \, angle \, at \, which \, the \, intensity \, is \, 50\% \, of \, the \, maximum."$

^{*} May require longer lead time

^{**} Denotes finish option