





The subterranean FC introduces glare-free controlled illumination into smaller scale spaces. The variety of cowlings and lamp options allows the FC to have an answer to most of lighting's pint-size problems.

FC: Well Light

NUMBER OF LEDs:	1	3	6	9
HALOGEN LUMEN OUTPUT EQUIVALENT:	10 Watt	20 Watt	35 Watt	50 Watt
USEFUL LED LIFE (L70):	50,000 hrs avg	50,000 hrs avg	50,000 hrs avg	50,000 hrs avg
INPUT VOLTAGE:	10 to 15V	10 to 15V	10 to 15V	10 to 15V
VA TOTAL: (Use to size the lighting controller)	2.4	4.5	13.5	13.5
WATTS USED:	2.0	4.2	10.1	11.2
LUMENS PER WATT (EFFICACY)	40.2	47.3	36.9	45.5
MAX LUMENS:	78.7	185.1	333.8	418.9
CRI (Ra)	78.8	81.2	78.9	79.7






FC: Well Light

FACTORY INSTALLED OPTIONS: Order 1 + 2 (optional) + 3 + 4 + 5

Step	Description	Code
1	FIXTURE	FC
2	OPTIONAL ZD	ZD (Refer to the Luxor page in the Lighting Control section)
3	LAMP	1LED, 3LED, 6LED, 9LED (50,000 avg. life hours)
4	GRATES	RG (Ring), CW (Cowling), LV (Louver)
5	FINISH	AB*, AT*, NP*, BS, WG, FW, AL, BZ, DG, WI, VF, SB, FB

EXAMPLE: FC-ZD-3LED-CW-FB = FC - ZD Option - 3LED Board - Cowling Grate - Flat Black Finish

PHOTOMETRICS:

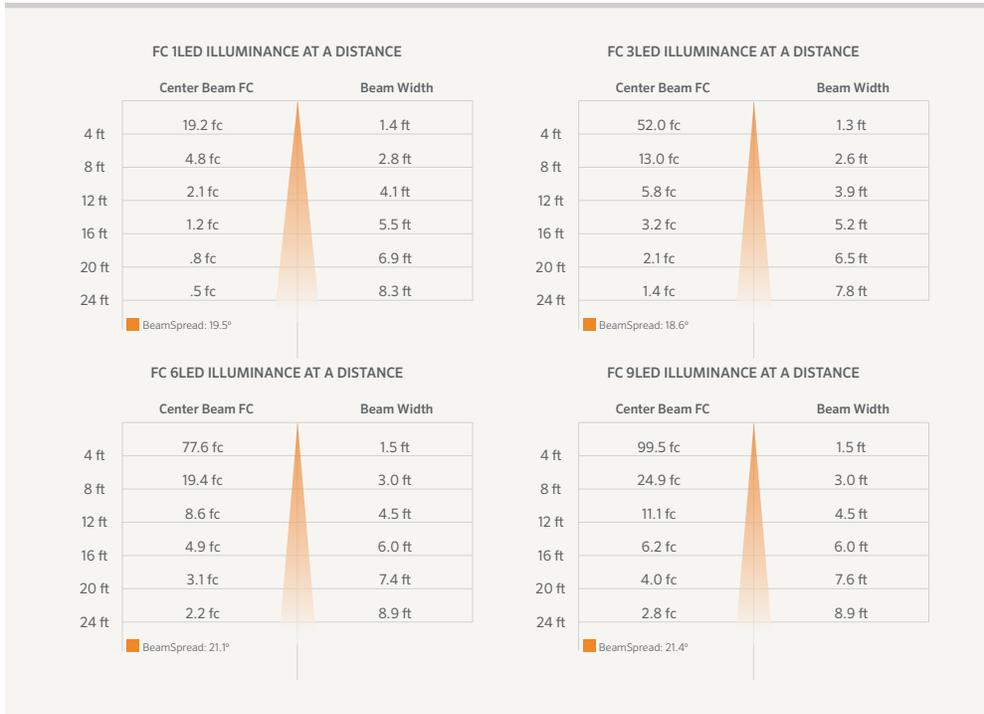

Beam angle is calculated using LM-79 method for SSL Luminaires:
 "Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum."

METALS

-  **AB** = Antique Bronze* (On Brass)
-  **AT** = Antique Tumbled* (On Brass)
-  **NP** = Nickel Plate*
-  **BS** = Natural Brass

POWDER COAT

-  **WG** = White Gloss
-  **FW** = Flat White
-  **AL** = Almond
-  **BZ** = Bronze Metallic
-  **DG** = Desert Granite
-  **WI** = Weathered Iron
-  **VF** = Verde Speckle
-  **SB** = Sedona Brown
-  **FB** = Flat Black

 All FC well lights come standard with amber, green, blue and frosted filters

The FC includes your choice of LED board, and choice of finish.