




Designed to covertly shine in any landscape, the KG is a metal-topped subterranean LED fixture that offers a flat top in a variety of color options. Inside is an LED module that allows for aiming the light to perfect the look on any feature or structure through time and growth.

KG: Well Light

NUMBER OF LEDS:	3	6	9
HALOGEN LUMEN OUTPUT EQUIVALENT:	20 Watt	35 Watt	50 Watt
USEFUL LED LIFE (L70):	50,000 hrs avg	50,000 hrs avg	50,000 hrs avg
INPUT VOLTAGE:	10 to 15V	10 to 15V	10 to 15V
VA TOTAL: (Use to size the lighting controller)	4.5	13.5	13.5
WATTS USED:	4.2	10.1	11.2
LUMENS PER WATT (EFFICACY)	30.4	22.9	27.2
MAX LUMENS:	127	264	320
CRI (Ra)	69.8	66.2	69.1

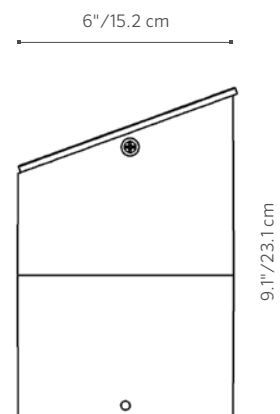



KG: Well Light

FACTORY INSTALLED OPTIONS: Order 1 + 2 (optional) + 3 + 4


Step	Description	Code
1	FIXTURE	KG
2	OPTIONAL ZD	ZD (Refer to the Luxor page in the Lighting Control section)
3	LAMP	3LED, 6LED, 9LED (50,000 avg. life hours)
4	FINISH	AB*, AT*, NP*, BS, WG, FW, AL, BZ, DG, WI, VF, SB, FB

EXAMPLE: KG-ZD-3LED-SB = KG - ZD Option - 3LED Board - Sedona Brown Finish

FIELD INSTALLED OPTIONS: Order Individually

Beam Angle Lenses		
LENS OPTIONS	3LED	6/9LED
Diffuser 18° (preassembled)	771300	771600
Flood Lens 30-32° (1 notch)	3LEDFLENS	9LEDFLENS
Wide Flood Lens 56-58° (2 notches)	3LEDWFLENS	9LEDWFLENS

PHOTOMETRICS:

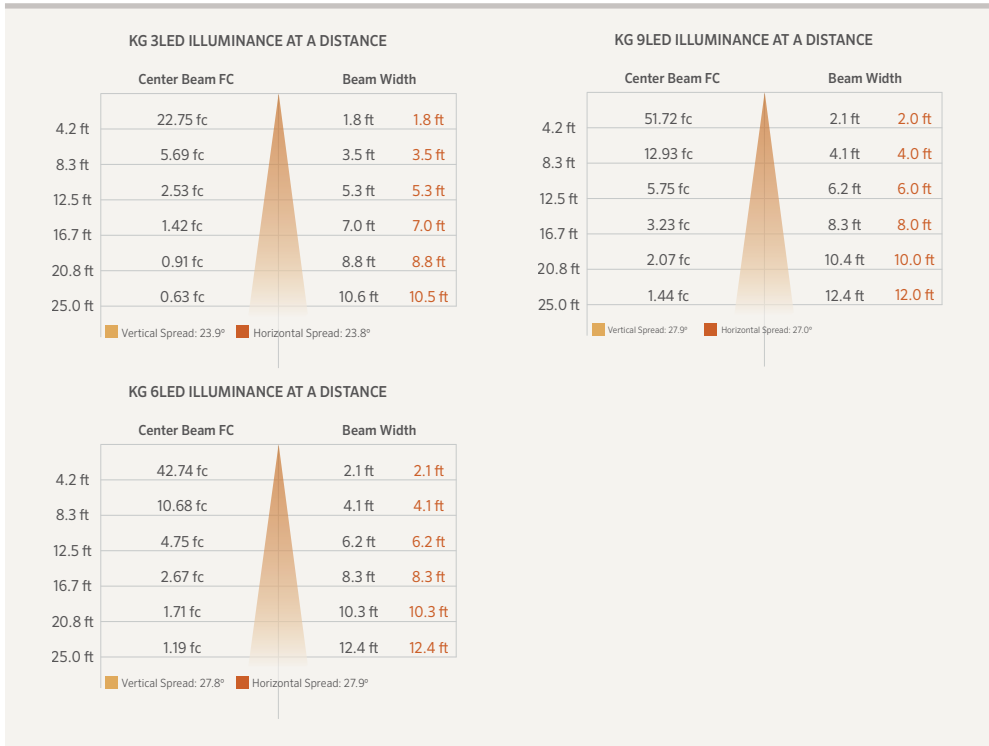

Beam angle is calculated using LM-79 method for SSL Luminaires:
 "Beam angle is defined as two times the vertical angle at which the intensity is 50% of the maximum."


METALS

- AB** = Antique Bronze* (On Brass)
- AT** = Antique Tumbled* (On Brass)
- NP** = Nickel Plate*
- BS** = Natural Brass

POWDER COAT

- WG** = White Gloss
- FW** = Flat White
- AL** = Almond
- BZ** = Bronze Metallic
- DG** = Desert Granite
- WI** = Weathered Iron
- VF** = Verde Speckle
- SB** = Sedona Brown
- FB** = Flat Black

The KG includes your choice of LED board, and finish.



* May require longer lead time

