

32" CHANNEL DRAIN DEBRIS CATCHER SUCTION OUTLET WITH ABS THREE-PORT MANUFACTURED SUMP FOR FIBERGLASS

VGB Series

FEATURES

Uniquely engineered concave/convex design allows for superior debris catching while exceeding UL articulate probe finger and knuckle ASME A112 2008 tests

For single or multiple drain use (see installation instructions for plumbing, hydrostatic valve/drain pipe and single or multi-pump connections)

Single Floor: 196 GPM at 1.3 fps Wall: 192 GPM at 1.2 fps

Floor/wall: 236 GPM at 1.5 fps Floor/wall: 156.2 GPM at 1.0 fps

50.1 square inch opening

#316 stainless steel screws

Manufactured from superior UV-resistant engineered polymers

Three ports: bottom 21/2" OD, 2" ID S/S; inside 2" threaded FPT; two 2" threaded plugs included

All components meet or exceed ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing exposure

Must use transitional glue when attaching to PVC pipe

Replace every five years from the date ofinstallation

4 per case

Also available:

p/n 32CRTSxxx


4 per case

The AquaStar line of suction outlet covers, compliant with the Virginia Graeme-Baker Pool and Spa Safety Act (ANSI/APSP 16-2011 and NSF/ANSI 50-2009a)



Part # 32CDLTFGxxx

Two drains in one!

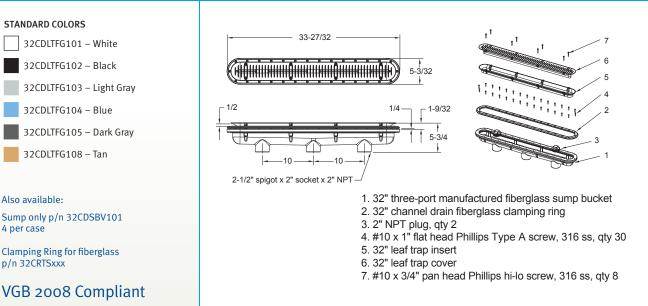

P 877-768-2717 F 877-276-POOL Outside the US: P +1-805-620-5060 F +1-949-336-1940 info@aquastarpoolproducts.com www.aquastarpoolproducts.com

* PROUDLY MADE ★ IN THE USA