

32" CHANNEL DRAIN DEBRIS CATCHER SUCTION OUTLET WITH FRAME

VGB Series

The AquaStar line of suction outlet covers, compliant with the Virginia Graeme-Baker Pool and Spa Safety Act (ANSI/APSP 16-2011 and NSF/ANSI 50-2009a)

FEATURES

Requires a minimum 3" sump depth the entire length of the cover

Uniquely engineered concave/convex design allows for superior debris catching while exceeding UL articulate probe finger and knuckle ASME A112 2008 tests

For single or multiple drain use (see installation instructions)

Single – 3" sump depth
Floor: 196 GPM at 1.3 fps
Wall: 192 GPM at 1.2 fps

Floor/wall: 236 GPM at 1.5 fps
Floor/wall: 156.2 GPM at 1.0 fps

50.1 square inch opening

#316 stainless steel screws

Manufactured from superior UV-resistant engineered polymers

All components meet or exceed ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing exposure

Includes disposable "dog bone" supports to retain shape during all phases of construction

Replace every five years from the date of installation

4 per case

Unblockable debris catcher





For field-fabricated sump (concrete pools)
Part # 32CDLTFRxxx

Two drains in one!

STANDARD COLORS

- 32CDLTFR101 – White
- 32CDLTFR102 – Black
- 32CDLTFR103 – Light Gray
- 32CDLTFR104 – Blue
- 32CDLTFR105 – Dark Gray
- 32CDLTFR108 – Tan

VGB 2008 Compliant

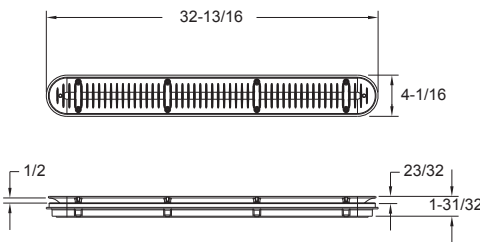

1. 32" channel drain, no sump, frame
2. 32" leaf trap insert
3. 32" leaf trap cover
4. 32" channel drain, frame support "dog bones", qty 4
5. #10 x 3/4" flat head Phillips Type A screw, 316 ss, qty 8
6. #10 x 1-1/4" pan head Phillips screw, 316 ss, qty 8