

CCW100 Pool System

Discover the Best & Healthiest Water Made Simple



- Clean, clear water
- Eliminate disinfection byproducts
- Simple & sustainable

Clear Comfort $^{\text{TM}}$ delivers a superior pool and spa experience with simple, proven disinfection and clean, clear water.

TWO-STAGE PROCESS

STAGE 1: Hydroxyls are formed

Clear Comfort uses an advanced oxidation process to create powerful hydroxyls that rapidly eliminate organic materials and contaminants.

STAGE 2: Hydrogen peroxide offers residual sanitation

Next, the process produces a low level of hydrogen peroxide that is distributed throughout the pool/spa for added protection.

Compare Clear Comfort

Salt systems produce chlorine, while UV and ozone systems require a residual sanitizer such as chlorine.

Simple & Effective

Our innovative advanced oxidation process delivers effective, chlorine-free or low-chlorine sanitation with minimal system maintenance.

No More Chloramines

Clear Comfort reduces harmful disinfection byproducts that are associated with skin, eye and lung irritation.

FACTS

Contact Us:

303.872.4477



info@clearcomfort.com



www.clearcomfort.com

UNIQUE BENEFITS





Health & Swimming Experience

- Eliminate harmful DBPs (disinfection byproducts)
- Eliminate chlorine odor
- No more red eyes or dry skin
- Eliminate lung irritation
- Fresher feeling water and better air quality
- · Reduce chemical exposure in your home


Installation & Operations

- Simple, fast venturi installation
- Self regulated
- Rugged NEMA 3R enclosure
- Simple indicator lights

Ongoing Benefits

- Less or no chlorine
- Low operational costs
- Reduce chemical handling and exposure
- Effective against chlorine resistant organisms like Cryptosporidium

SIMPLE SYSTEM INTEGRATION

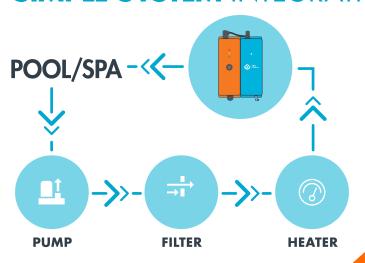

SIMPLE ANNUAL CARTRIDGE REPLACEMEN



SYSTEM DETAILS

- Venturi injector installation
- Installs in the return lines to the pool
- Works with and safe for existing equipment



Water Treatment Capability Max. Flow Rate Dimensions Injection Method Operating Voltage Power Consumption **Contract Commitment** Up to 40,000 gallons 90 GPM 12" x 8" x 3" Venturi

110V to 230V 10 Watts

None

90-day money back guarantee* 5-year system warranty

1-year replacement cartridge