




Sideburner Cut-Out (Model # UI0456L, UI0456N)

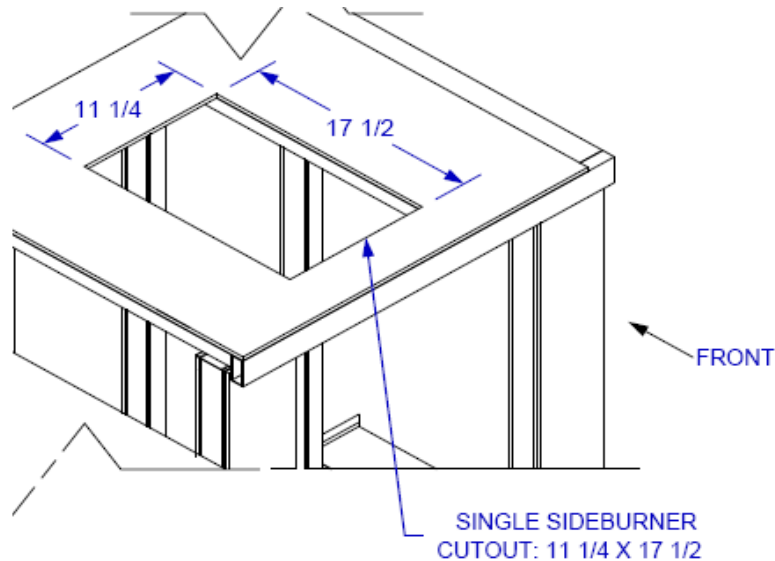

Sideburner Installation and Lighting Procedure

Step 1- Installation

- To install your sideburner, place the unit into the designated cut out (see above for cut out dimensions). Securely attach a 3/8" gas line to the 3/8" male flared fitting, located underneath the sideburner.

Step 2- Lighting

- In order to light your sideburner, you must have the lid in an open position. Locate the adjustment knob, push down and turn knob counter-clockwise until you hear a click. If burner does not ignite, repeat the previous step several times. After attempting several times and burner still fails to ignite, turn the knob to the off position and contact a licensed plumber.

Step 3- Adjustment of Flame

- To adjust the flame to your sideburner, slowly rotate the knob to desired flame height.

Step 4- Turning off

- To turn off your sideburner, turn the knob clockwise to the off position.

Caution: To prevent injury, Bull Outdoor Products recommends that protective eye and hand wear are used for the lighting process of the unit.