



Optional Long Shroud

PROJECT

CATALOG #

TYPE

NOTES

MR Up Light


The MR copper/brass up light brings the elegance and performance of precious metals to an additional line of FX Luminaire fixtures, and serves as a chic supplement to lighting projects in coastal environments.

Quick Facts

- Copper/brass construction
- Natural copper/brass or antique finishes
- Accepts MR-11 lamps
- ProAim™ adjustability
- Phase and PWM dimmable
- Input voltage: 10-15V

Luminaire Classification

Series	Base	Plus	Premium
Designer	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Standard	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

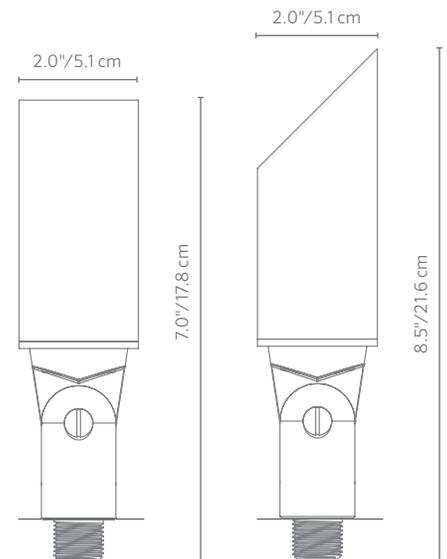

MR Up Light SPECIFICATIONS

Output	20
Total Lumens	185
Input Voltage	12V
Input Power (W):	20.0

FX Luminaire

FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of highly efficient lighting fixtures that can be utilized to create elegant, cutting-edge landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

Materials

Die-cast C360 brass knuckle/bass assembly with brass hardware and machined angled glass support. C110 extruded copper shroud.

Lamp

GU4 lamp base. Preinstalled MR-11.

Socket

GU 4 socket with retaining clips for MR-11 lamps. Ceramic socket base with heat-resistant contact pad. Stainless steel retaining clips ensure high spring force retention.

Wiring

18 AWG SPT-1W 105°C 300V 3-meter length.

Power

Input 10-15VAC/VDC 50/60Hz. Remote transformer required (specify separately).

Lens

Tempered glass lens with shock resistance and high tolerance for thermal expansion and stress.

Finish

Options of natural brass/copper finish or antiqued finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect. Antique finishes sealed with a clear TGIC powder coat layer.

Weight

2.05 lbs.

Manufacturing

9001:2015 certified facility.

Hardware

¼-20 x ¾" brass angle lock screw. Includes ProAim™ ratcheting ABS spike for 360° horizontal rotation in 10° increments. Tamper-resistant locking screw included.

Ambient Operating Temperature

0°F to 140°F

Control

ZDlink or ZDclink utilizes Luxor® technology to zone light fixtures in up to 250 groups, dim each group in 1% increments between 0 and 100%, or change to one of 30,000 colors with RGBW LEDs. Select the ZD option for zoning/dimming or ZDC for zoning/dimming/color. Standard fixture is zoneable with ZDlink or ZDclink.

Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.

Installation Requirements

Designed for installation in the upward direction only.

Warranty

10-year limited warranty on luminaire; no warranty on incandescent or halogen lamp.

Listings



MR Up Light ORDERING INFORMATION

Fixture Size	Lamp Option	Shroud	Finish
MR	<input type="checkbox"/> NL No Lamp	<input type="checkbox"/> [blank] Default Straight Cutoff Shroud	<input type="checkbox"/> CU Copper 
	<input type="checkbox"/> 20 20W Halogen	<input type="checkbox"/> LS Long Shroud (45°)	<input type="checkbox"/> NP Nickel Plate 


EXAMPLE FIXTURE CONFIGURATION:

MR-NL-LS-CU = MR-No Lamp-Long Shroud-Copper Finish

* Ships with Super Slot Spike



MOUNTING OPTIONS: Specify Separately

Mounts	Catalog No.	
<input type="checkbox"/> LONG SLOT SPIKE 2.5" 6.3 cm x 10" 25.4 cm	250015840000	
<input type="checkbox"/> SUPER J-BOX 2.5" 6.3 cm x 12" 30.5 cm	SJ-XX*	
<input type="checkbox"/> 3-PRONG SPIKE 5.1" 6.3 cm x 9.0" 22.9 cm	250020020000	
<input type="checkbox"/> PROAIM™ RATCHETING SPIKE 2.5" 6.3 cm x 10" 25.4 cm	PARS	
<input type="checkbox"/> POST MOUNT 2.5" 6.3 cm x 13" 33 cm	PM-XX*	
<input type="checkbox"/> VERSABOX 2.2" 5.7 cm x 1.5" 3.9 cm	VB-050-XX*	

* YY = riser height in inches (6" increments between 6" and 36"),
XX = finish code

RISER OPTIONS: Specify Separately

Riser	Code	
<input type="checkbox"/> RISER 0.8" 2.1 cm Diameter	YY-R-GT-XX*	

LENS ACCESSORIES: Specify Separately

Item	Code	
<input type="checkbox"/> HEX BAFFLE MR-11 Size	250015260000	
<input type="checkbox"/> FROSTED LENS MR-11 Size	250010480000	
<input type="checkbox"/> SOLITE SPREAD LENS MR-11 Size	250015240000	

* YY = riser height in inches (6" increments between 6" and 36"),
XX = finish code

MR Up Light PHOTOMETRICS

MR-20 Illuminance at a Distance

Feet	Center Beam	Beam Width	
		Vertical 37.6°	Horizontal 36.7°
4.0 ft	25.4 fc	2.7 ft	2.7 ft
8.0 ft	6.34 fc	5.4 ft	5.3 ft
12.0 ft	2.82 fc	8.2 ft	8.0 ft
16.0 ft	1.58 fc	10.9 ft	10.6 ft
20.0 ft	1.01 fc	13.6 ft	13.3 ft
24.0 ft	0.70 fc	16.3 ft	15.9 ft

