

NEW

STENNER PUMPS®

S FIXED & S VARIABLE SERIES

PERISTALTIC METERING PUMPS

FIXED



LED Indicators



S3F



S4F


VARIABLE



Potentiometer
and LED Indicators



S3V

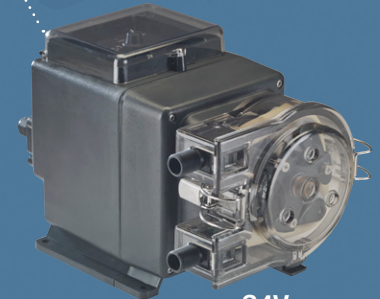

S4V

Key Features

- Leak Detection & Optional Relay
- Backup Pump Capability
- LED Indicators
- Up to 150 gpd / 25 psi max. (567 lpd / 1.7 bar)
- Up to 60 gpd / 100 psi max. (227 lpd / 6.9 bar)

Agency Listings

- NEMA 4X
- NSF 50*
- cULus
- NSF 61 & 372
- CE*

* Specific configurations

S FIXED & S VARIABLE SERIES

S FIXED SERIES Flow Rate Outputs

Item Number Prefix	Pump Tube	Pressure max. psi	Gallons per Day	Gallons per Hour	Ounces per Hour	Ounces per Minute	Liters per Day	Liters per Hour	Milliliters per Hour	Milliliters per Minute	Pressure max. bar
S3F01	1	100	5.0	0.21	27.0	0.44	19.0	0.79	789.0	13.0	6.9
S3F02	2	100	17.0	0.71	91.0	1.51	64.0	2.68	2681.0	45.0	6.9
S3F03	3	25	40.0	1.67	213.0	3.56	151.0	6.31	6309.0	105.0	1.7
S3F07	7	100									6.9
S3F04	4	25	60.0	2.50	320.0	5.33	227.0	9.46	9464.0	158.0	1.7
S4F7X*	7X*	100									6.9
S3F05	5	25	85.0	3.54	453.0	7.56	322.0	13.41	13407.0	223.0	1.7
S4F5X	5X	25	150.0	6.25	800.0	13.33	568.0	23.66	23659.0	394.0	1.7

Approximate Output @ 50/60HZ

S VARIABLE SERIES Flow Rate Outputs

Item Number Prefix	Pump Tube	Turn Down Ratio	Pressure max. psi	Gallons per Day	Gallons per Hour	Ounces per Hour	Ounces per Minute	Liters per Day	Liters per Hour	Milliliters per Hour	Milliliters per Minute	Pressure max. bar
S3V01	1	20:1	100	0.3-5.0	0.01-0.21	1.3-27.0	0.02-0.44	1.0-19.0	0.04-0.79	39.4-789.0	0.7-13.0	6.9
S3V02	2	20:1	100	0.8-17.0	0.03-0.71	4.5-91.0	0.07-1.51	3.2-64.0	0.13-2.68	134.1-2681.0	2.2-45.0	6.9
S3V03	3	20:1	25	2.0-40.0	0.08-1.67	10.7-213.0	0.18-3.56	7.6-151.0	0.32-6.31	315.5-6309.0	5.3-105.0	1.7
S3V07	7	20:1	100									6.9
S3V04	4	20:1	25	3.0-60.0	0.13-2.50	16.0-320.0	0.27-5.33	11.4-227.0	0.47-9.46	473.2-9464.0	7.9-158.0	1.7
S4V7X*	7X*	20:1	100									6.9
S3V05	5	20:1	25	4.3-85.0	0.18-3.54	22.7-453.0	0.38-7.56	16.1-322.0	0.67-13.41	670.3-13407.0	11.2-223.0	1.7
S4V5X	5X	20:1	25	7.5-150.0	0.31-6.25	40.0-800.0	0.67-13.33	28.4-568.0	1.18-23.66	1182.9-23659.0	19.7-394.0	1.7

Approximate Output @ 50/60HZ

* INTERTEK/ETL Sanitation Listed, conforms to standard NSF/ANSI 50 (excludes any model with a 7X tube or Versilon® tube or a ball check valve with stainless steel spring).

NOTICE: The information within these charts is solely intended for use as a guide. The output data is an approximation based on pumping water under a controlled testing environment. Many variables can affect the output of the pump. Stenner Pump Company recommends that all metering pumps undergo field calibration by means of analytical testing to confirm their outputs.