

Product: _____

Type: _____

Project: _____

In-Ground Trim Ring Cover

Natural Metal


Composite Black

Fixture Ordering Guide

Product Code	Finish
IGT049	AB - Antique Brass
	BR - Brass
	CB - Composite Black

Order Lamp Separately

Example: IGT049-AB-MR16BAB/827/LED

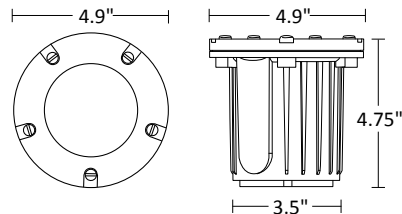

Housing:

- Single-piece compression molded fiberglass reinforced polyester composite
- Silicone o-ring provides a watertight seal

Cover:

- Antique Brass, Brass or Composite Black

Lens:

- Shock and heat-resistant clear, tempered glass

Socket:

- Ceramic GU5.3 bi-pin socket
- Stainless steel retention clip ensures secure lamp seating and protects the lamp from shock and vibration
- Heat-resistant wire leads

Lamp:

- MR16 – 50W maximum
- ProLED® MR16 lamps offer 40,000 hour rated life, 10-15V input voltage range, multiple beam spreads (flood, narrow flood, spot and wide flood) and 2700K, 3000K and colors (amber, blue, green, red and color changing options).

Electrical:

- 12 Volt system
- Pre-wired with 36", 18-2 lead wire
- Two King® DryConn™ waterproof connectors included

Certifications:

- ETL Listed to UL Standard 1838 and CSA C22.2 No. 250.7

Fasteners:

- All fasteners are corrosion-resistant stainless steel

Warranty:

- Backed by a lifetime (Brass) or 10-year (Composite) limited warranty to be free from defects in material and/or workmanship
- ProLED® MR16 lamps installed in Sollos fixtures per recommended instructions are backed by a 20-year limited warranty

Photometrics:

