


Deck Under-Step Light

Natural Metal



Fixture Ordering Guide

Product Code	Finish
DUS060	AB - Antique Brass
	CU - Copper
	SS - Stainless Steel
DUS120	CU - Copper
	SS - Stainless Steel

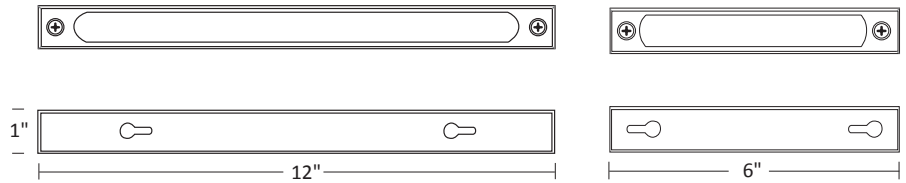

Order Lamp Separately

Example: DUS060-SS-912/1WW/LED

Housing:

- Aluminum construction
- 6" fixture operates one lamp
- 12" fixture operates two lamps

Cover:

- Antique Brass, Copper or Stainless Steel
- Copper ages gracefully as patina develops
- Removable cover for easy lamp access

Lens:

- Shock and heat-resistant frosted glass lens

Socket:

- Miniature wedge-base ceramic socket
- Heat-resistant wire leads

Lamp:

- T5 or T3.25 wedge-base – 13W maximum per lamp
- ProLED® 912 lamp offers 20,000 hour rated life, 10-18V input voltage range and 3000K color temperature

Electrical:

- 12 Volt system
- Pre-wired with 36" lead wire
- Two King® DryConn™ waterproof connectors included

Certifications:

- ETL Listed to UL Standard 1838 and CSA C22.2 No. 250.7

Fasteners:

- All fasteners are corrosion-resistant stainless steel
- Optional stainless steel mounting plate is available

