



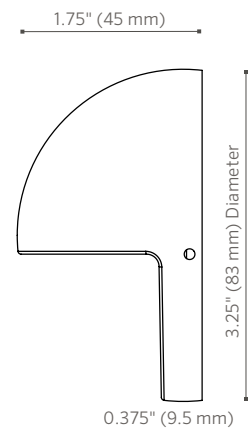
PROJECT
CATALOG #
TYPE
NOTES

**MM** Wall Light **STANDARD PREMIUM**

Specify the surface-mounted MM when an integral mount is not practical. The internal parabolic reflector maximizes lighting efficiency while tempered glass diffuser optics soften the beam spread transition.

Quick Facts

- Die-cast aluminum or brass
- Natural or powder coated brass finishes
- Two-layer marine-grade anodization and powder coat finish
- Silicone-encapsulated COB LED
- Compatible with Luxor® technology
- Phase dimmable
- Input voltage: 10-15V



# MM Wall Light SPECIFICATIONS

## FX Luminaire

FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. We offer a full spectrum of specification-driven lighting fixtures that can be utilized to create elegant, cutting-edge landscape lighting systems for commercial or residential applications. Our products are available exclusively via our extensive professional distributor network.

## Materials

Die-cast C360 brass or A380 aluminum faceplate and housing, with stainless steel hardware.

## Lamp

G4 lamp base. Preinstalled T3 LED lamp option with G4 base offers a warm 2,700K color temperature with a minimum rated life (L70) 33,000 hours.

## Power

Input 10-15 VAC/VDC, 50/60 Hz. Remote transformer required (specify separately).

## Socket

Socket contains MoistureBlock™ technology, preventing moisture from wicking up into sealed areas of the fixture.

## Wiring

18 AWG (1 mm); SPT-1W; 220°F (105°C); 300V; 10' (3 m) length.

## Housing

Die-cast aluminum housing with capacity for one G4 LED.

## Faceplate

Die-cast brass or aluminum faceplate.

## Lens

Frosted polycarbonate lens with high tolerance for thermal expansion, stress, and abuse.

## Ambient Operating Temperature

0°F to 140°F (-18°C to 60°C)

## Hardware

Two tamper-resistant setscrews included.

## Weight

1.1 lbs. (0.5 kg)

## Finish

Selection of powder coat, natural brass or antiqued brass finish with brushed (Antique Bronze) or tumbled (Antique Tumbled) effect. Antique finishes sealed with a clear TGIC powder coat layer. Two-layer protection of sulfuric acid anodization and polyester TGIC powder coat, providing superior outdoor weathering in all conditions.

## Control

Luxor zoning and dimming technology with use of Luxor Cube (LCM-LV). Luxor technology allows up to 250 groups, dimmable in 1% increments between 0 and 100%.

## Manufacturing

9001:2015 ISO certified facility

## Installation Requirements

Designed for installation on a vertical wall in the downward lighting direction only.

## Sustainability

Innovation meets conservation in the design and manufacturing of our products. Where we can, we use recycled materials while maintaining superior functionality. Our LED products provide high-quality light at optimal energy efficiency, lifespan, and durability.







## Warranty

10-year limited warranty on fixture; 5-year limited warranty on lamp.

## Listings





# MM Wall Light ORDERING INFORMATION

Fixture	Lamp	Finish			
MM	<b>LED20W</b> 20W Equivalent LED Lamp, 2,700K	<b>BS</b> Natural Brass		<b>WG</b> White Gloss	
		<b>BZ</b> Bronze Metallic		<b>FW</b> Flat White	
		<b>DG</b> Desert Granite		<b>AL</b> Almond	
		<b>WI</b> Weathered Iron		<b>SV</b> Silver	
		<b>SB</b> Sedona Brown		<b>NP</b> Nickel Plate	
		<b>FB</b> Black			

EXAMPLE FIXTURE CONFIGURATION:  
MM-LED20W-FB



## LUXOR® TECHNOLOGY OPTIONS: Specify Separately

Cubes	Code	
<b>LOW-VOLTAGE CUBE</b> Supports AC dimmable LEDs and incandescent MAX LOAD: 60W/5A	LCM-LV	
<b>RELAY/0-10V CUBE</b> Supports relay switch MAX LOAD: 250VAC/5A	LCM-RLY-010V	

MoistureBlock is a trademark of DSM&T Co. Inc.

© 2020 Hunter Industries Inc. Hunter, FX Luminaire, all related logos, and all other trademarks are property of Hunter Industries, registered in the U.S. and other countries.