


VGBA-2017 PRODUCT SPECIFICATIONS Suction Outlet Fitting Assembly (SOFA) VGBA-2017 Flow Ratings, Sump Dimensions, Sump Flow Path Zone, and Head Loss Curves



DIRECTIONS: Please follow the SOFA specific flow rates, sump specifications, and flow path zone information below. The installation must conform to these minimum/maximum requirements including the SOFA dimension defined in Figure 1. The flow path zone is defined by dimensions A through E. Please write the Cover Model Number, orientation, and SOFA Model Flow Rating on the VGBA DRAIN COVER IDENTIFICATION INFORMATION label that comes with each AquaStar Pool Products, Inc. drain cover.

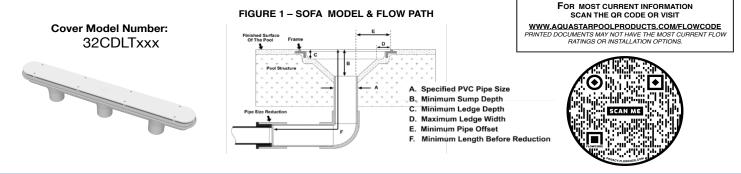


SOFA Model No.	Pipe Size	Pipe Depth	Orientation	Flow Rating	Head Loss
	(Nominal)	(Minimum)	(Wall / Floor)	(GPM)	Curve
32CDLT-32f_A-2.5x2b_B2.98_C.95_D.2_E.475_F16	2.5" x 2 (b)	2.98"	Floor (f)	100	А

Note 1: "SOFA Model No" nomenclature; bottom pipe = (b), side pipe = (s). See Fig 1 for capital letters A through E

Note 2: Head loss inHg is measured 16 to 24 inches from the finish surface of the pool. Reference Fig 1 dimension F.

Note 3: THE COVER MODEL 32CDLTxxx IS ONLY AUTHORIZED FOR USE WITH AQUASTAR MANUFACTURED 3-PORT SUMPS. USE WITH FIELD-BUILT SUMPS IS NOT AUTHORIZED.

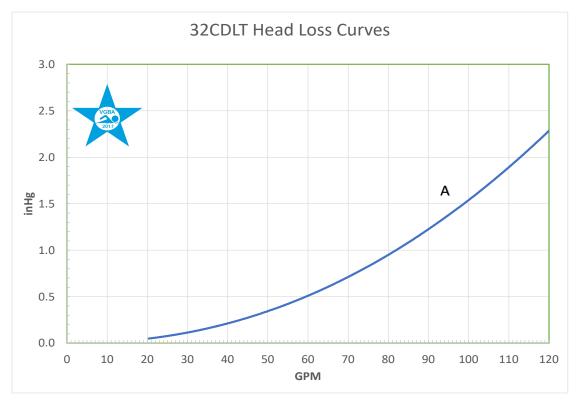

© 2022 AquaStar Pool Products. Inc. All rights reserved.