

9" SQUARE WAVE ANTI-ENTRAPMENT SUCTION OUTLET COVER WITH 3" SOCKET SUMP



**VGB CERTIFIED
SPECIFICATIONS**

Floor Flow Rating
224 GPM at 1.5 fps

Wall Flow Rating
224 GPM at 1.5 fps

Sump Depth
Use sump included

Open Area
48.4 in²

FEATURES

All components meet or exceed ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing exposure

Sump manufactured from strong PVC sump with 3" socket and 4" spigot side port, and 2" socket 2 1/2" spigot bottom port

Manufactured from superior UV-resistant engineered polymers

Comes with 3" and 2" NPT cap with o-ring for pressure testing and winterizing

#316 stainless steel screws

Trademarked VGB compliance button easily identifies VGB 2008 compliant cover from on deck and underwater

Online product support including downloadable CAD files, General Certificate of Conformity, third-party certificate, installation instructions and more

Replace drain cover every five years from the date of installation

1 per case

NEW

Hassle-free pressure testing and winterizing



Optional 2" hydrostatic relief valve available p/n SK43101





**Hassle-free
pressure testing and winterizing**
Comes with a 3" and 2" NPT cap with O-ring. No knock-outs required.

Part # WAV9WRxxxSSB

STANDARD COLORS

- ☐ WAV9WR101SSB – White
- ☐ WAV9WR102SSB – Black
- ☐ WAV9WR103SSB – Light Gray
- ☐ WAV9WR104SSB – Blue
- ☐ WAV9WR105SSB – Dark Gray
- ☐ WAV9WR108SSB – Tan

VGB 2008 Compliant

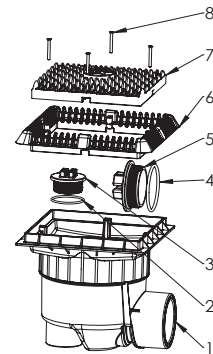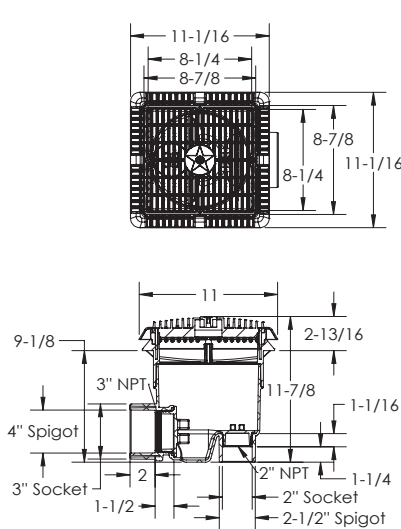

1. Side Port Sump Bucket, 9" Square Frame
2. 2" Plug O-Ring
3. 2" NPT Plug
4. 3" Plug O-Ring
5. 3" NPT Plug
6. 9" Square Riser Ring
7. 9" Square "Wave" Suction Outlet Cover
8. 10 x 13/4" Flat Head Phillips, 316 SS, Qty 4

P 877-768-2717 F 877-276-POOL Outside the US: P +1-949-336-1940 F +1-949-336-1940
info@aquastarpoolproducts.com www.aquastarpoolproducts.com