



Commercial Compool LX80™

Pool/Spa Control Systems

Central Control Center

The commercial Compool LX80™ offers easy access to the emergency shut-off switches for any aquatic environment. This user friendly integrated control system includes commercial pool and spa on/off, two time clocks to control daily filtration and built-in cool down cycle for each gas heater. The LX80 is waterproof and low voltage offers excellent protection against electrical shock. The low voltage emergency shut-off switch is capable of shutting OFF all spa and pool related equipment including the filter pump, jet pumps and air blowers. Pushed IN, this shut-off switch cuts all power to the pool or spa, while sounding an alarm. The LX80 is the "must have" to meet safety requirements of city, county and state authorities.

Standard Features

- Emergency Shut-Off Switch
- Pool Filter Pump Time Clock
- Spa Filter Pump Time Clock
- Jet Pump Count-Down Timer
- Pool Heater Cool-Down Cycle
- Spa Heater Cool-Down Cycle
- ETL Listed
- One-year limited warranty.



Commercial Compool LX80™

by Pentair Water Commercial Pool and Aquatics™



Specifications

- LX80 Power center with pool and spa timers
..... (3 power relays for pool filter, spa filter and jet pump)
- RCS1 Remote outdoor switch (Single Button)
- ES02 Emergency shut-off switch with alarm

Part # / Accessories:

- 2COND 2 Conductor Cable (between LX80 and outdoor switches)
- RCS1 Remote switch (for additional pumps)
- ES02 Additional shut-off switch w/alarm
- RLYLX Additional power relays (for additional pumps; 4 max.)
- MODSOL Temperature control module
- TS5L Solar temperature sensor (for pool and spa)
- 262026 3-Way Positive Valve
- 263047 3-Port 2'/2.5' solar valve w/auto drain
- 263045 Motorized solar valve actuator


Dimensions:

- LX80 Control Center: 15" H x 13" W x 5"D
- RCS1 Remote Switch: 2.75" W x 4.5" H
- ES02 Shut-off w/Alarm: 5" W x 4.5" H
- 263045 Valve Actuator: 6.5" L x 4" H x 3.5" W
- 263047 Solar Valve: 2" socket (2½" slip outside)


Electrical Rating:

- High Voltage ... Field Selectable: 115/230 VAC
- Low Voltage Controller: 24 VDC
..... Valve Actuator: 24 VAC
- Current Relay: 20 AMP@230 V
- RLYLX3HP..... Relay: 25 AMP

Ask for the Acu-Trol® AK110™ or AK600™ commercial water quality automation systems.

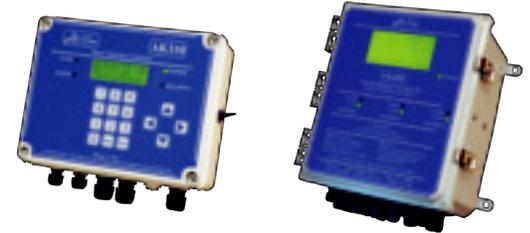

The new Acu-Trol AcuPort™ offers easy wireless automation control for a commercial pool from any Windows® based computer.

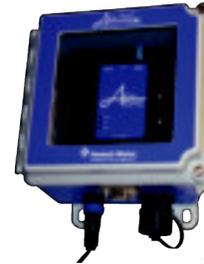

Acu-Trol®, Pentair Pool Products® Paragon Aquatics®, Stark™, Sta-Rite®, Berkeley®, Aurora®, are trademarks and/or registered trademarks of Pentair Water Pool and Spa, Inc. and/or its affiliated companies in the United States and/or other countries. Unless noted, names and brands of others that may be used in this document are not used to indicate an affiliation or endorsement between the proprietors of these names and brands and Pentair Water Pool and Spa, Inc. Those names and brands may be the trademarks or registered trademarks of those parties or others.



1620 Hawkins Ave
Sanford, NC 27330
Phone: 1-800-831-7133
www.pentaircommercial.com