


# FX | LUMINAIRE® ACCESSORIES

ACCESSORIES



## SSS – SUPER SLOT SPIKE®



This 8" spike is the standard for all FX uplites and small pathlites. Constructed from UV resistant ABS it incorporates a composite thread insert featuring a slot cut out of the threads for your wires. No fumbling with the wires when trying to attach the spike!

## CDS – CAPANNADINOCE®




The CapannaDiNoce® features a water-resistant compartment where you can do the LiteSplice. No more baggies! The compartment also has a place to store your service coil, hold your wire nuts, and thread your run in/out the bottom. This new spike will make it easier to drive it into the toughest turf, while the barbed tip will help it stay put.

## SJ – SUPERJ-BOX®



The top cap of the SJ is solid brass or powdercoated aluminum alloy. Fits onto our CapannaDiNoce® to create an attractive, easy to install wirenut J-Box. Use on visible entryway path and uplites.

## PM – POSTMOUNT®

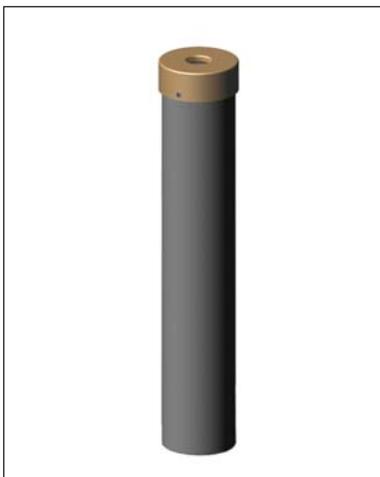


For commercial projects or where a clean finish is needed for the cable connection specify the Post Mount®. Milled from solid brass or aluminum alloy and powdercoated to match any standard FX finish. Includes 12" PVC pipe mount. Sturdier than the Super J-Box® when cast into a concrete footer. 2.50" x 12.50"

## MJ – MINI J-BOX®



This micro aluminum option allows the TrellisSolare® (MJ-TS) and the MU spotlite fixture (MJ-MU) to be surface mounted to trees and eaves without an exposed wirenut connection. Comes with all necessary mounting hardware. Available in all standard FX finishes. 3.50" x 2.125" x 1.320"

## VB – VERSA BOX®

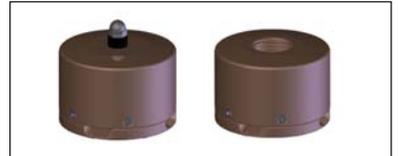

The VersaBox® is an innovative patent pending mounting box that can be screw mounted to an eave or surface mounted on decks. Use the VB with all FX pathlites, spotlites or TS series downlites. Made from solid brass, can be powdercoated with any of our standard finishes. 2.25" dia. x 1.75"

## PDM – POSTMODERNEDECKMOUNT®



The PostModerneDeckMount is made conveniently for the PostModerne to be surface mounted on decks. Made from solid brass, can be powdercoated with any of our standard finishes. 3.00" dia. x 1.19"

# FX | LUMINAIRE® ACCESSORIES

## LSK – LITESPLICE® KIT



To insure long-term performance and integrity of your FX lighting system all underground cable splices must be protected from moisture and corrosive fertilizer chemicals. SpliceGel combined with the LiteSplice® kit includes materials for 25 two conductor splices.

## WL – WELLLITE®




Similar to the LiteGuard® but designed for installation in turf or gravel areas where a flush mounted uplight is required. This model is not recommended for use in areas that receive ground cover as it will obscure the optical opening after a short time.

## LG – LITEGUARD®



When mounting an uplight in a planter or gravel area is desired specify the LiteGuard®. The housing protects the uplight from plant material and keeps it out of sight. The open top design facilitates fixture adjustment and relamping.

## HB – HEXBAFFLE®

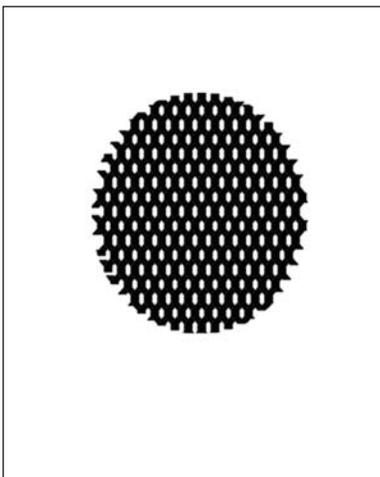


The alloy honeycomb HexBaffle® fits inside the lens cap of all FX spotlite fixtures to internally cut off light spill to 45°.

## RR – RECESSORRING®



To reduce glare to a minimum specify the RecessorRing® option for the MU, LO and TE. This patented alloy unit fits inside the fixture housing (in front of the lamp) recessing it back away from the fixture opening thereby internally cutting off glare. An excellent choice for downlighting or pathway planter uplighting (walk-by view) with the MU spotlite. U.S. Patent No. 6,612,720

## FILTERS

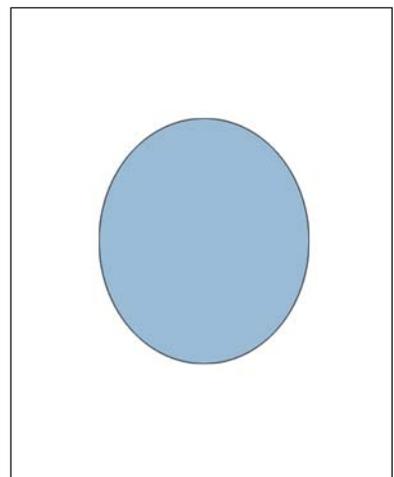

Color filters shift color tone to enhance desired effect. FX stocks many different color filters and lenses. Color filters include red, blue, green and peach. Clear, frosted and spread also available.