


FX | LUMINAIRE®
 LR-20, LR-35, LR-50

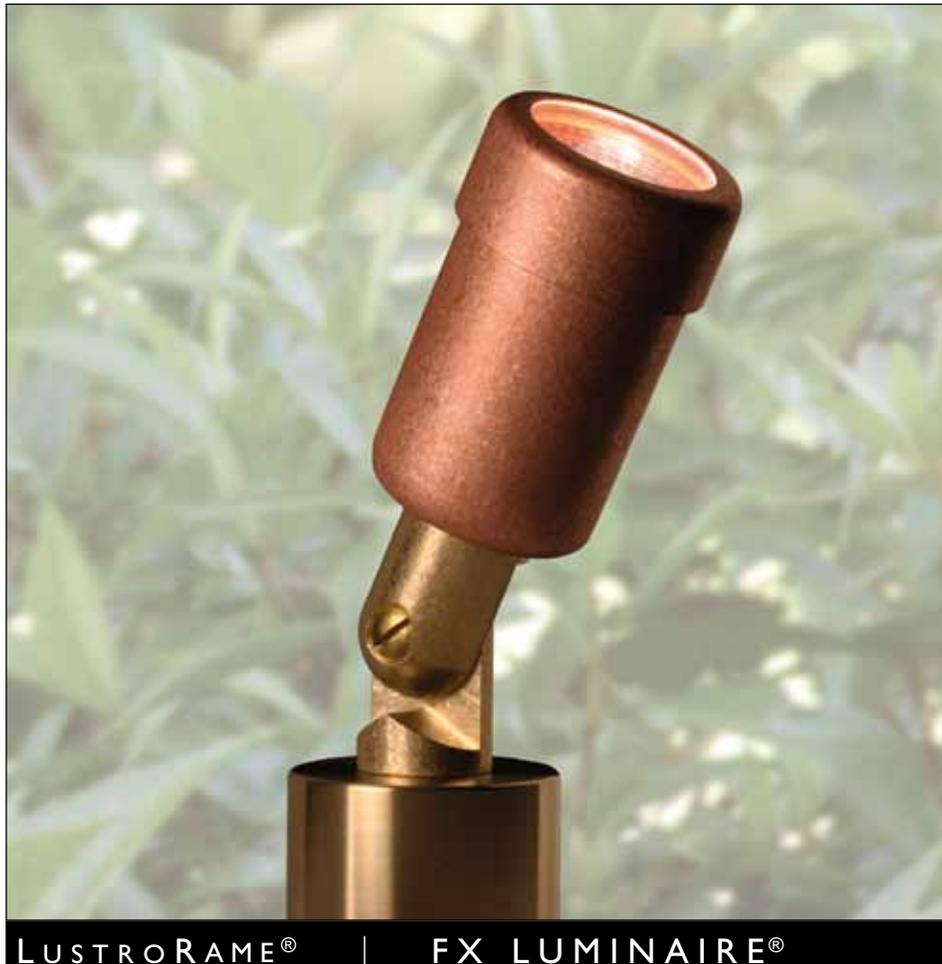

THE FINEST UPLIGHT
 YOU CAN SPECIFY

Engineered for the client that wants to make a long-term investment in their garden, the Lustrorame® is without peer. This patent pending rugged micro luminaire provides the power and control of the halogen MR-16 lamp family. Through the innovative use of an O-ring hydraulic compression cap seal, the potentially troublesome threads and screws found in other spotlights are eliminated.

The Lustrorame® is constructed without any compromise using 100% non-ferrous alloys and silicone seals. The Lustrorame® accommodates 28 different lamps ranging from 10-50 watts with a variety of beam spreads.

The copper will patina naturally over time and can be accelerated with solution spray. For patina formulas visit our website at: www.FXL.com/learning/patina.htm

LUSTRO RAME® | FX LUMINAIRE®




INNOVATIVE SOLUTIONS

Any spotlight's durability and reliability can be determined by the integrity of two key components. First are the moisture seals— if water penetrates the fixture housing socket then lamp failure will occur. Second is the long term integrity of the knuckle joint. The LR's innovative solution solves both challenges and provides your clients trouble-free ownership.

Compare FX copper luminaires with any other, and you will find a dramatic difference in quality of materials, precision of fit and consistency of finish.


Note: This fixture is designed for uplighting only.

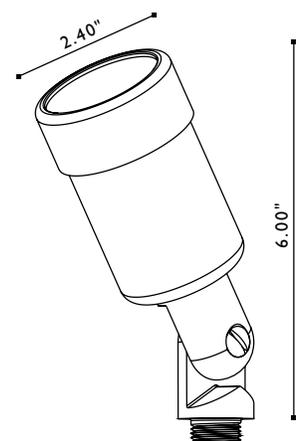

LUSTROAME® – ORDERING INFORMATION

The LR comes standard with a 20 watt Halogen MR-16 lamp, Clear Lens, Super Slot Spike®, and in Copper (CU).

STANDARD PARTS:

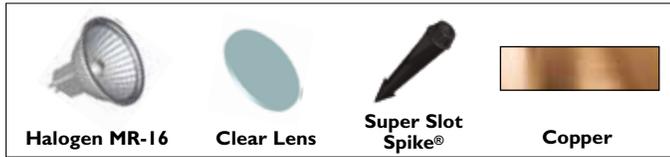

STANDARD OPTIONS:

1 + 2 + 3 ORDERED TOGETHER ON SAME LINE

STANDARD LAMP CONFIGURATIONS:

Choose from any watt Halogen (H).

FIXTURE/CODE	WATTAGE/CODE	DESCRIPTION
1 LR 	2 HALOGEN (H) LAMP OPTIONS:	
	20H	20 watt Halogen, wide, 36° beam, Avg. life 5000 hours; now available in 10000 hours <i>(new)</i>
	20V-H	20 watt Halogen, very narrow, 10° beam, Avg. life 5000 hours
	35H	35 watt Halogen, wide, 36° beam, Avg. life 5000 hours; now available in 10000 hours <i>(new)</i>
	35V-H	35 watt Halogen, very narrow, 10° beam, Avg. life 5000 hours
	50H	50 watt Halogen, wide, 36° beam, Avg. life 5000 hours; now available in 10000 hours <i>(new)</i>
	50N-H	50 watt Halogen, narrow, 25° beam, Avg. life 5000 hours;
	50V-H	50 watt Halogen, very narrow, 10° beam, Avg. life 5000 hours

LAMP NOTE:

Some lamps are by special order. Please check with our factory for availability.

STANDARD FINISH OPTIONS:

Copper is standard. All other choices must be specified.

CODE	DESCRIPTION
CU	Copper <i>(will naturally patina)</i>

NON-STOCKING FINISH OPTIONS:

Allow extra time for the following finish options:

3 NP	Nickel Plate
-------------	--------------

ORDERING SAMPLE:

SECTIONS:	DESCRIPTION:	WHAT TO ORDER:
1 + 2 + 3 <small>optional</small>	+	= LR-20
A , B and/or C	Glare Shield	= GS
	PostMount	= PM

NON-STANDARD OPTIONS:

A, B AND C, MUST BE ORDERED ON SEPARATE LINE!

ADDITIONAL GLARE CONTROL OPTIONS:

Does not come pre-assembled with glare control.

CODE	DESCRIPTION
A GS	Glare Shield
HB	HexBaffle®

ADDITIONAL LENS OPTIONS:

Comes pre-assembled with a clear lens. All others will arrive in separate box.

CODE	DESCRIPTION
B F	Frosted Lens
S	Spread Lens
SO	Solite Lens
CF-1	Peach Lens
CF-2	Blue Lens
CF-3	Green Lens
CF-4	Red Lens

ADDITIONAL MOUNTING OPTIONS:

Comes pre-assembled with Super Slot Spike®.

All other mounting options will arrive in separate box.

CODE	DESCRIPTION	SIZE
C CDS	CapannaDiNoce®	2.00" x 10.00"
SJ	SuperJ-boX®	2.50" x 12.00"
PM	PostMount®	2.50" x 13.00"