

18" SQUARE FRAME WITH FOUR 9" SQUARE WAVE ANTI-ENTRAPMENT SUCTION OUTLET COVERS AND VENTED RISER RINGS



**VGB CERTIFIED
SPECIFICATIONS**

Floor Flow Rating
628 GPM at 1.1 fps

Wall Flow Rating
628 GPM at 1.1 fps

Sump Depth
6" minimum

Open Area
176.8 in²

FEATURES

All components meet or exceed ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing exposure

Manufactured from superior UV-resistant engineered polymers


#316 stainless steel screws

Online product support including downloadable CAD files, certificate of conformity, third-party certificate, installation instructions and more

See next page for additional product configurations

Replace drain cover every five years from the date of installation

4 per case

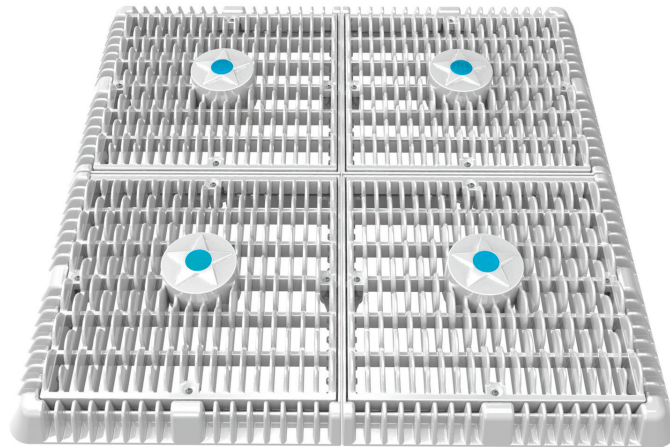

U.S. patents D623727 and D663388

Part # WAV18WRxxx




Fits: AquaStar (standard 18" square frames); Pentair (#1 selling) with 3/4" deep existing window grid frame and 4x4 screw hole pattern

STANDARD COLORS

- WAV18WR101 – White
- WAV18WR102 – Black
- WAV18WR103 – Light Gray
- WAV18WR104 – Blue
- WAV18WR105 – Dark Gray
- WAV18WR108 – Tan

Also available with four grates only and vented riser rings for 3/4" deep retrofits
p/n WAV18WRNFxxx

VGB 2008 Compliant

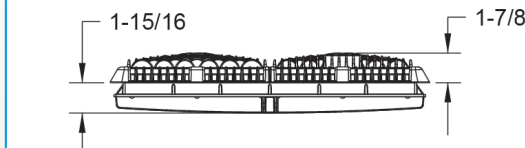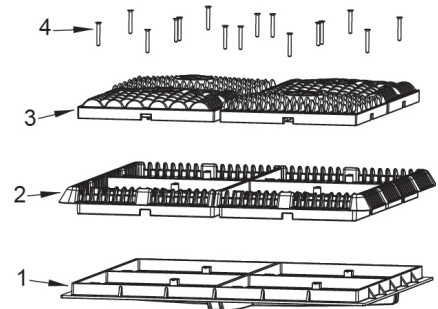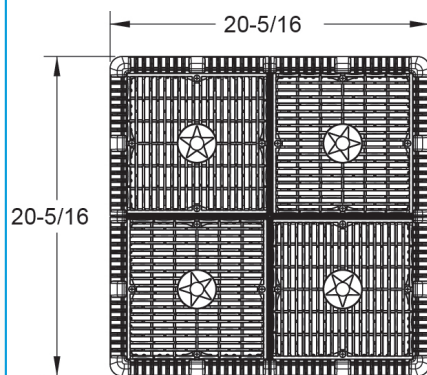

1. 18" Square Mud Frame
2. 18" Square Vented Riser Ring
3. 9" Wave Square Drain Cover
4. 10 x 1-3/4" Flat Head Phillips, 316 SS, Qty 16