

# 24" SQUARE FRAME WITH FOUR 12" SQUARE FLAT GRATE ANTI-ENTRAPMENT SUCTION OUTLET COVERS



**VGB CERTIFIED SPECIFICATIONS**

**Floor Flow Rating**  
1531 GPM at 1.4 fps

**Wall Flow Rating**  
1531 GPM at 1.4 fps

**Sump Depth**  
12" minimum

**Open Area**  
352 in<sup>2</sup>

## FEATURES

All components meet or exceed ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing exposure

Installs flat – level with finish

Manufactured from superior UV-resistant engineered polymers

#316 stainless steel screws


Online product support including downloadable CAD files, certificate of conformity, third-party certificate, installation instructions and more

See next page for additional product configurations

Replace drain cover every five years from the date of installation

1 per case

**Unblockable! No second suction outlet or backup SVRS required**

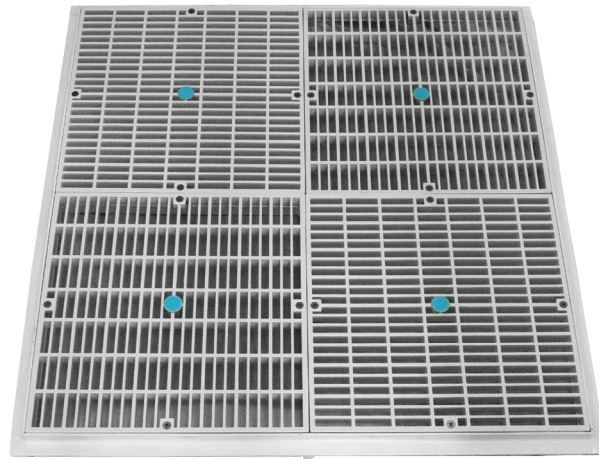

Part # 24xxx

Grates fit: AquaStar (standard 24" square frames); Pentair (#1 selling) with 3/4" deep existing window grid frame and 4x4 screw hole pattern




## STANDARD COLORS

- WAV24101 – White
- WAV24102 – Black
- WAV24103 – Light Gray
- WAV24104 – Blue
- WAV24105 – Dark Gray
- WAV24108 – Tan

Replaces p/n P24xxx

Also available with four grates for 3/4" deep retrofits p/n 24NFxxx

**VGB 2008 Compliant**

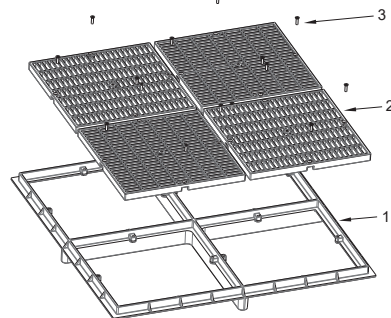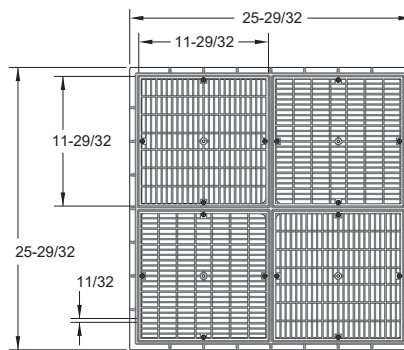

1. 24" Square Mud Frame
2. 12" Flat Square Suction Outlet Cover, Qty 4
3. 10 x 3/4" Flat Head Phillips Screw, 316 SS, Qty 16