

VGB Series

Product Specification Sheet

Features

For single or multiple drain use (see installation instructions)

Requires a minimum 3" sump depth

Single Floor: 206 GPM at 5.8 fps Wall: 96 GPM at 2.8 fps

Floor/wall: 41 GPM at 1.5 fps

11.2 square inch opening

#316 stainless steel screws

Manufactured from superior UV-resistant engineered polymers

Easily and safely retrofits most brands' existing 12" frames* (see chart on pages 164-166 and installation instructions for details and special requirements)

All components (cover, adapter plate, frame, screws) meet or exceed NSF 50/ASME/ANSI A112.19.8a-2008 national standards and ASTM G154 UV testing exposure

Listed with IAPMO R&T

12 per case

The AquaStar line of suction outlet covers, compliant with the new

12" Shallow Square to 10" Anti-Entrapment


Suction Outlet Cover and Frame

Virginia Graeme-Baker Pool and Spa Safety Act (ASME/ANSI A112.19.8a-2008)



Part # SRFS12xxx



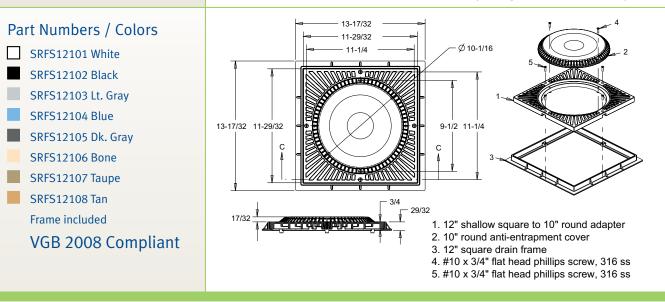

P 877-768-2717 F 877-276-POOL P Outside the US: +1-949-459-1202 info@aquastarpoolproducts.com www.aquastarpoolproducts.com