32" CHANNEL DRAIN FLAT GRATE ANTI-ENTRAPMENT SUCTION OUTLET COVER AND PVC THREE-PORT MANUFACTURED SUMP



Certified to NSF/ANSI/CAN 50 ANSI/APSP/ICC-16 2017 Open Area 25.9 in²

For SOFA Specific Flow Ratings and specifications please scan QR code or visit www.aquastarpoolproducts.com/flowcode



FEATURES

Certified, Listed, and Labeled in conformance with APSP/ANSI/ICC-16 2017 and NSF/ANSI/CAN 50 standards

Three ports: bottom 2½" OD, 2" ID S/S; inside 2" threaded FPT; two 2" threaded plugs included

Strong PVC sump does not require transitional glue

Designed for use with 2" hydrostatic relief valve part #HVxxx

Disposable plastic pre-gunite/plaster insert keeps debris out and retains sump shape during construction

#316 stainless steel screws

Manufactured from superior UV-resistant engineered polymers

Online product support including downloadable CAD files, General Certificate of Conformity, third-party certificate, installation instructions and more

Replace drain cover every five years from the date of installation

4 per case

NOTICE: White assemblies will come with a white PVC sump, all other colors are shipped with a medium gray sump

U.S. patent No. 9,790,699

Unblockable!

NEW Improved water stop and sump design





NEW Water Stop and Textured Sump



With sump (concrete pools)
Part # 32CDFLxxx

STANDARD COLORS

32CDFL101 – White


32CDFL102 – Black

32CDFL103 - Light Gray

32CDFL105 – Dark Gray

Also available as sump only p/n 32CDPxxx 4 per case

Also available cover only without sump/frame p/n 32CDFLNFXXX (new part #32CDFLNFKXXX) 40 per case

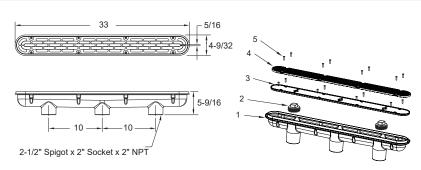

- 1. 32" Three-Port PVC Sump
- 2. 2" Tapered Threaded Pipe Plug, Qty 2
- 3. 32" Channel Drain Plaster Shield
- 4. 32" Channel Drain Flush Cover
- 5. 10 x 3/4" Flat Head Phillips, 316 SS, Qty 16

Plaster Shield And Screws To Be Removed After Gunite/Plaster Application