
The Features You Need!


	PRO1300/h-o	: PRO1100e	PRO800	PRO600	PRO500	PRO400
Heat Exchanger Construction Temperature Control Ideal for Pools Up To: (Gallons) Remote Compatibility	TITANIUM Digital 35,000 gal 2 & 3-Wire	TITANIUM Digital 28,000 gal 2 & 3-Wire	TITANIUM Digital 24,000 gal 2 & 3-Wire	TITANIUM Digital 18,000 gal 2 & 3-Wire	TITANIUM Digital 13,000 gal 2 & 3-Wire	TITANIUM Mechanical 13,000 gal 2- Wire
Performance Testing Results:						
*(80°F air, 80°F water, 80% RH) COP BTU/hr	5.8 127,000	6.0 112,000	6.5 83,000	6.4 60,000	5.1 50,000	5.1 50,000
**(80°F air, 80°F water, 63% RH) COP BTU/hr COP	5.2 118,000 4.0	5.7 107,000 4.0	6.0 79,000 4.0	6.0 57,000 4.0	4.9 43,000 3.5	4.9 43,000 3.5
**(50°F air, 80°F water, 63% RH) BTU/hr	82,000	4.0 77,000	4.0 50,000	35,500	27,500	27,500
Voltage Required:	230/208 V					
*Operating Current:	29 Amps	26 Amps	20 Amps	14 Amps	10 Amps	10 Amps
Recommended Circuit Breaker:	50 Amps	50 Amps	25 Amps	30 Amps	20 Amps	20 Amps
Maximum Circuit Breaker:	60 Amps	60 Amps	30 Amps	35 Amps	25 Amps	25 Amps
Refrigerant:	R410A	R410A	R410A	R410A	R410A	R410A
Minimum Water Flow Rate:	25 GPM					
Maximum Water Flow Rate:	80 GPM	80 GPM	80 GPM	80 GPM	60 GPM	60 GPM
Dimensions: w"x d"x h"	33"x36"x45"	33″x36″x45″	33"x36"x33"	33″x36″x33″	30″x30″x28.5″	30″x30″x28.5″
Net Weight:	280 lbs.	280 lbs.	230 lbs.	230 lbs.	147 lbs.	147 lbs.
Shipping Weight:	295 lbs.	295 lbs.	245 lbs.	245 lbs.	169 lbs.	169 lbs.

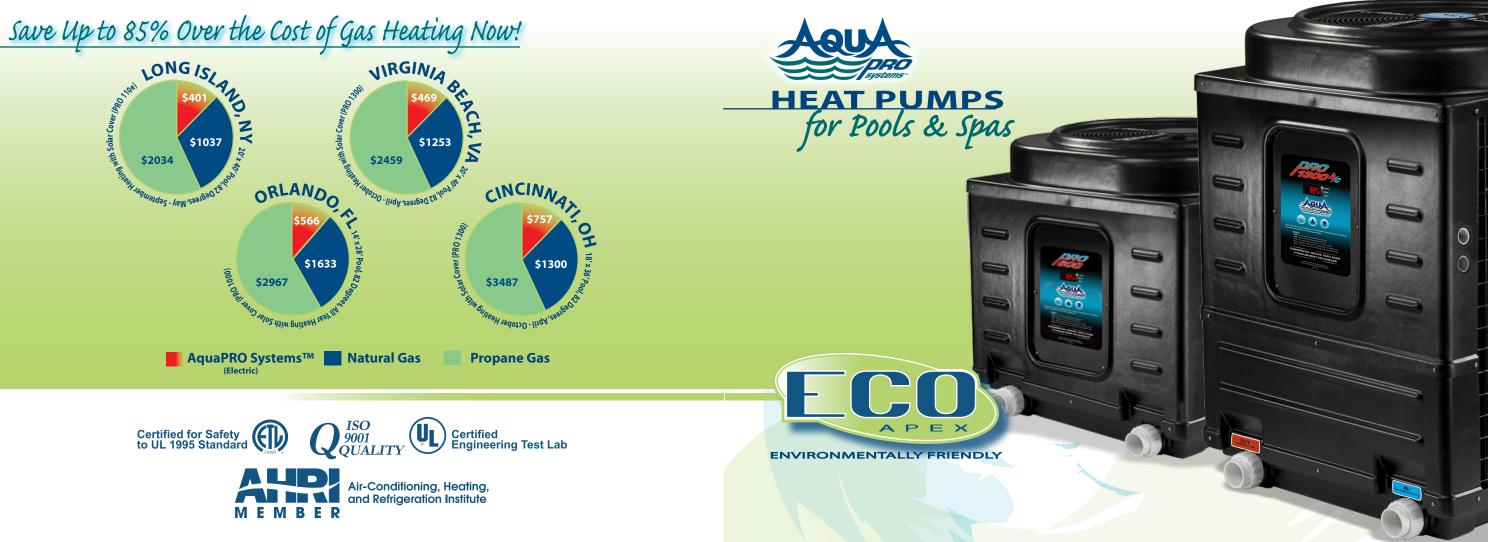

* Ratings outside scope of ARI1160

** Ratings in accordance with ARI1160

Size Options You Want!

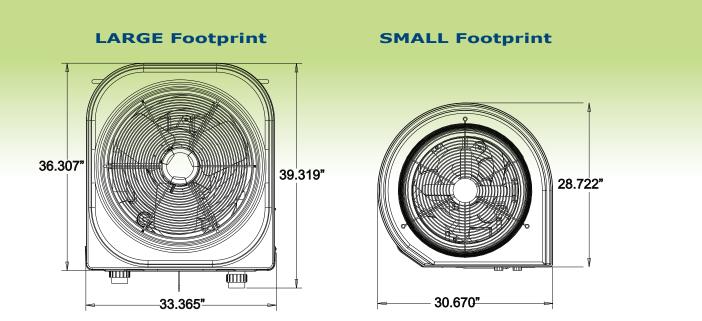



877.278.2797 | F 888.610.3839 cs@aquaprosystems.com | www.aquaprosystems.com

SL8870 2/10

Best In Class!



Consistently heat your pool and extend your swimming season with our full line of heat pumps! The most efficient way to heat your pool or spa!

- 100% Pure, Commercial-Grade Titanium Heat Exchanger
- PRO Smart Control Panels Are the Most Innovative and Adaptable On the Market Today!
 Self Diagnostic Codes, Determining Your Issue for You
 Automatic Defrost Mode Allowing Heating In Outside Temperatures As Low As 38°

 - High Temperature Lock-Out Feature

 - Compatible With All Known Remote Systems
 Override Any Time Clock To Maintain Desired Temperature

• Innovative Silent Series Product Design

Heat Pump Line Advantages

SAVE MONEY! Save Up To 85% Over The Cost Of Gas Now!

POOL SAFETY Worry-Free Use With Children, No Gas or Fire!

Continuous HEAT and Comfort Set It... and Forget It!









PRO SERIES DUAL ELECTRONIC TEMPERATURE CONTROLLED

- Automated Self Diagnostic System Allowing You To PinPoint Any Issue With Onscreen Codes
- 100% Pure Titanium Heat Exchanger,
- Commercial-Grade and No Chemical Exclusions!
- Super Silent Scroll Compressor





PRO SERIES HEAT And COOL EXTENDER

- Heat Your Pool With Weather As Cool as 38°
- Cool Your Pool In Those Sweltering Summer Months
- 100% Pure Titanium Heat Exchanger, Commercial-Grade and No Chemical Exclusions!



PRO SERIES TIME CLOCK ELIMINATOR

Eliminate The Need For A Time Clock All

Together

• Automatically Override The Timer On Your Pool Pump To Maintain Your Pre-Set Perfect Pool Temperature

• 100[']% Pure Titanium Heat Exchanger, Commercial-Grade and No Chemical Exclusions!







PRO SERIES DUAL ELECTRONIC TEMPERATURE CONTROLLED

- Automated Self Diagnostic System Allowing You To Help Pin Point Any Issue With Onscreen Codes
- 100% Pure Titanium Heat Exchanger, Commercial-Grade and No Chemical Exclusions!
- Small Foot Print Is Ideal for Tight Spaces
- *PRO Series Single Mechanical Temperature Controlled

We are here to make your pool experience unforgettable!