

FX | LUMINAIRE®
PR-10, PR-15, PR-20



PETTORISOLUTO® | FX LUMINAIRE®


**ALLURING DESIGN,
 GRACEFUL PERFORMANCE**

Designed specifically for those who prefer soft rounded shapes, to angles, the PR is unlike any other. Its unrivaled performance coupled with its exceptional pricing will fit nicely into any demanding design.

This patent pending luminaire, milled from extra-heavy gauge copper and solid brass, is designed for today's crowded planters. When incorporated with plant material, the PR simply disappears into the garden.


Compare FX copper luminaires with any other, and you will find a dramatic difference in quality of materials, precision of fit and consistency of finish.

The copper will patina naturally over time and can be accelerated with solution spray – for patina formula visit our website at: www.FXL.com/learning/patina.htm

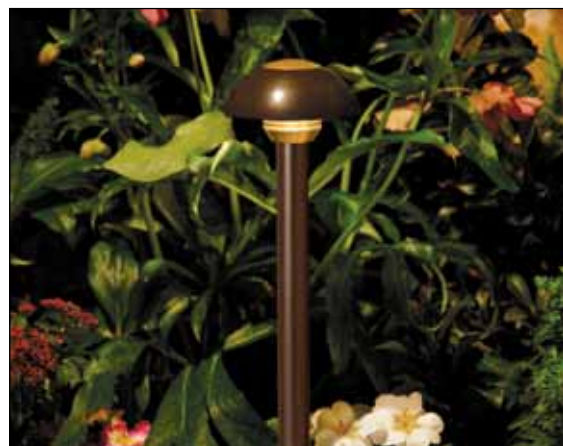

PERFECT HARMONY

Highlight your detailed or simplistic garden while making whatever is beyond it remain in darkness. Lighting should be used to highlight, not overpower. Use it to create boundaries and mystery. Lighting your landscape can be compared to the art of stage lighting. You must know where to strategically place your lighting to create emotion. You can illuminate paths, focus attention on fountains and enhance a gorgeous area of fauna. Different types of lighting can combine to create an intimate scene.

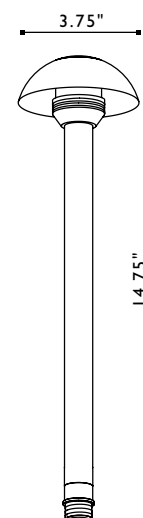

PETTO RISOLUTO® - ORDERING INFORMATION


The PR comes standard with a 20 watt Xenon G4 lamp, Super Slot Spike®, and in Copper (CU).

STANDARD OPTIONS:

1 + 2 + 3 + 4 ORDERED TOGETHER ON SAME LINE


AVAILABLE LAMP CONFIGURATIONS:

Your choice of one lamp will come pre-installed.

FIXTURE/CODE	WATTAGE/CODE	AVG. LIFE HOUR
1 	2 XENON LAMP OPTIONS:	
	10	10,000
	15	10,000
	20	5000
	HALOGEN (H) LAMP OPTIONS:	
	10H	2000
	20H	2000

STANDARD RISER OPTIONS:

Your choice of one riser option will come pre-assembled.
Riser Specs: Copper 0.75" Diameter

CODE	DESCRIPTION
3 	8R 8" Riser
	12R 12" Riser
	18R 18" Riser









STANDARD FINISH OPTIONS:

Copper is standard. All other choices must be specified.

CODE	DESCRIPTION
 CU	Copper <i>(will naturally patina)</i>

NON-STOCKING FINISH OPTIONS:

Allow extra time for the following finish options:

	4 BZ	Bronze Metallic
	DG	Desert Granite
	BF	Black Wrinkle
	VF	Verde Speckle
	SB	Sedona Brown
	WF	White Wrinkle
	WI	Weathered Iron
	NP	Nickel Plate

STANDARD PARTS:



ORDERING SAMPLE:

SECTIONS:	DESCRIPTION:	WHAT TO ORDER:
1 + 2 + 3 + 4 <small>optional</small>	 +  +  + 	= PR-10-12R
A	PostMount®	= PM


NON-STANDARD OPTIONS:

MUST BE ORDERED ON SEPARATE LINE!

ADDITIONAL MOUNTING OPTIONS:

Comes pre-assembled with Super Slot Spike®.


All other mounting options will arrive in separate box.

CODE	DESCRIPTION	SIZE
A 	CDS CapannaDiNoce®	2.00" x 10.00"
	SJ SuperJ-boX®	2.50" x 12.00"
	PM PostMount®	2.50" x 13.00"

PHOTOMETRICS:

Spacing for minimum footcandle illumination on level ground.

*Note: 1fc for commercial projects
.3fc for residential projects*



Footcandle Power (12R riser)

Distance	PR-10	PR-20
2'	1.7	2.6
4'	.31	.57
6'	.10	.13
8'	.04	.05
10'	.02	.03
12'	.01	.02
14'		.01

For conversion to lumens: Multiply footcandles x 10. See FX glossary for a full description of fc and lumens.