

## 10" ROUND DEBRIS CATCHER ANTI-ENTRAPMENT SUCTION OUTLET COVER AND MUD FRAME

## **VGB** Series

## **FEATURES**

For single or multiple drain use 3" minimum sump depth (see installation instructions)

Single Floor only – with Sun Lid: 60 GPM at 0.7 fps

Floor only – without Sun Lid: 125 GPM at 1.4 fps

Floor only: 137.5 GPM at 1.5 fps 91.6 GPM at 1.0 fps

When 1.0 or 1.5 fps installations are not required, always use the lower tested flow rate

29.4 square inch opening

Additional sump versions also available

#316 stainless steel screws

Manufactured from superior UV-resistant engineered polymers

Meets or exceeds ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing

Replace every five years from the date of installation

VGB 2008 Compliant

6 per case

 STANDARD COLORS

 10LT101 – White

 10LT102 – Black


 1LT103 – Light Gray

 10LT104 – Blue

 10LT105 – Dark Gray

 10LT108 – Tan

The AquaStar line of suction outlet covers, compliant with the Virginia Graeme-Baker Pool and Spa Safety Act (ANSI/APSP 16-2011 and NSF/ANSI 50-2009a)

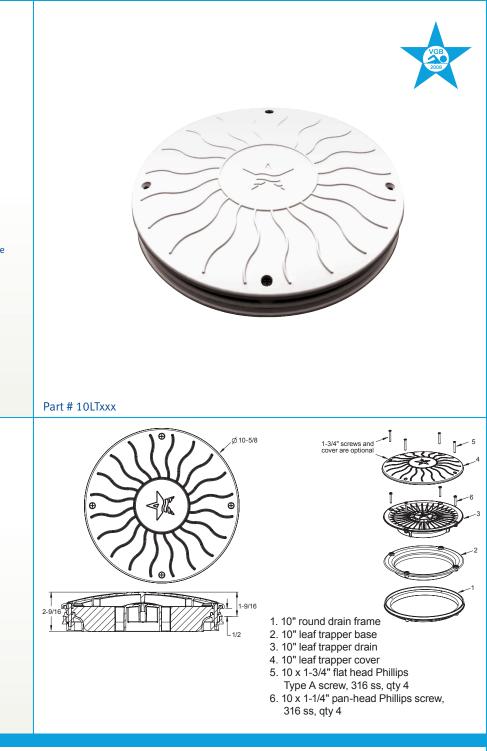

**P** 877-768-2717 **F** 877-276-POOL Outside the US: **P** +1-805-620-5060 **F** +1-949-336-1940 info@aquastarpoolproducts.com www.aquastarpoolproducts.com



## ADDITIONAL PRODUCT CONFIGURATIONS FOR 10LTXXX

