

Contact Us

Toll-Free: 877-771-6970

Customer Service: Press "1"
Technical Support: Press "2"
Repair Department: Press "4"
Shipping Department: Press "5"
Accounting: Press "6"

**Factory Hours: Monday – Friday
8:00 am – 4:00 pm EST**

Factory Address:
Power Vac Corporation, Inc.
4811 NE 12th Avenue
Oakland Park, FL 33334

E-mail:
CustomerService@PowerVacCorporation.com

Web site:
www.PowerVacCorporation.com

Visit our web site to find a distributor in your area.

POWER VAC CORPORATION DOES NOT SELL TO THE PUBLIC.



2013 Owner's Manual



Start Up Guide

Product Specifications2

Battery and Charger Info3

Install Your Battery4

Installing Your Charge Plug4

Assembling Your Filter Bags5

Power Vac Filter Bags5

Equipment Maintenance6-7

Male & Female Plug Installation8

Troubleshooting9

Repair Services10

Warranty Info10

Caring For Your Service Cart11

Purchasing Replacement Parts12

Parts List for PV210013

Parts List for PV220014

Parts List for PV250015

Parts List for PV300016


Parts List for Large Service Cart17

Parts List for Mini Cart18

Contact UsBack Page

Parts List for Mini Cart

This cart carries the PV2100 or PV2500 vacuum and battery.
Sold separately, as an on-site cart only.

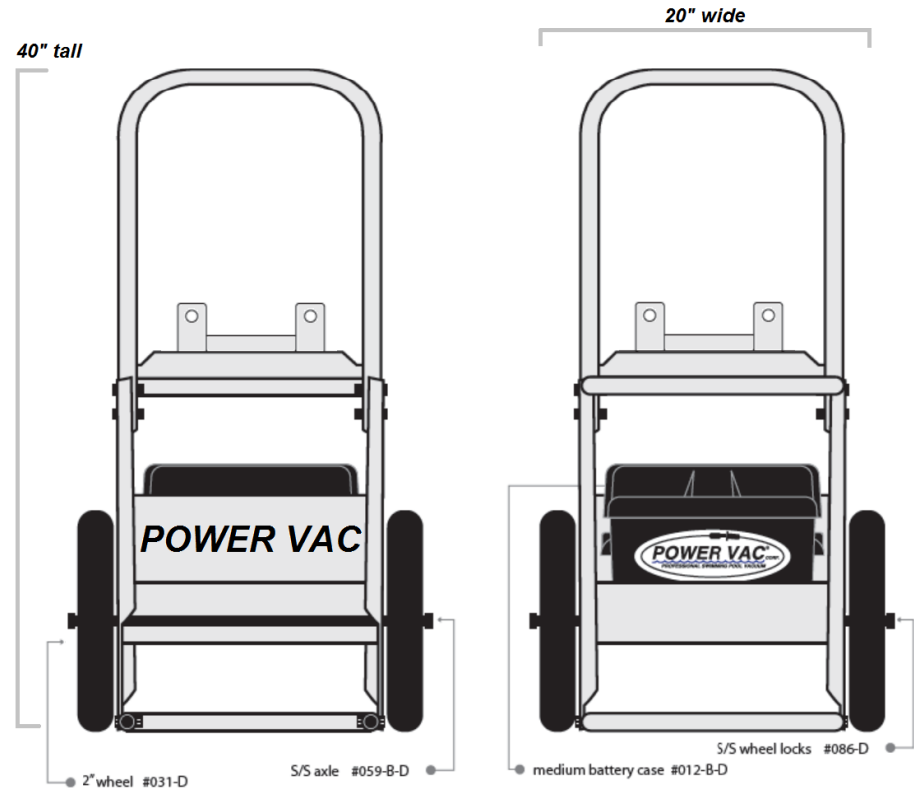


ITEM #	DESCRIPTION
068-D	MINI CART (ON-SITE VERSION) WILL ONLY FIT PV2100 AND PV2500 MODELS!
REPLACEMENT PARTS	
012-B-D	MEDIUM BATTERY CASE WITH FEMALE PLUG
031-D	12" WHEEL WITH 2 BEARRINGS
049-A-D	WHEEL BEARING FOR 12" WHEEL
059-B-D	STAINLESS STEEL AXAL FOR MINI CART
084-12-D	12" BUNGEE STRAP
086-D	S/S WHEEL LOCK NUT (SPLIT COLLAR)

Parts List for Large Cart

Carries everything needed to service a pool.
Available in a truck mounted version or an on-site version.

Not sold separately. Item must be purchased as a package. See PV2100 & PV2200.

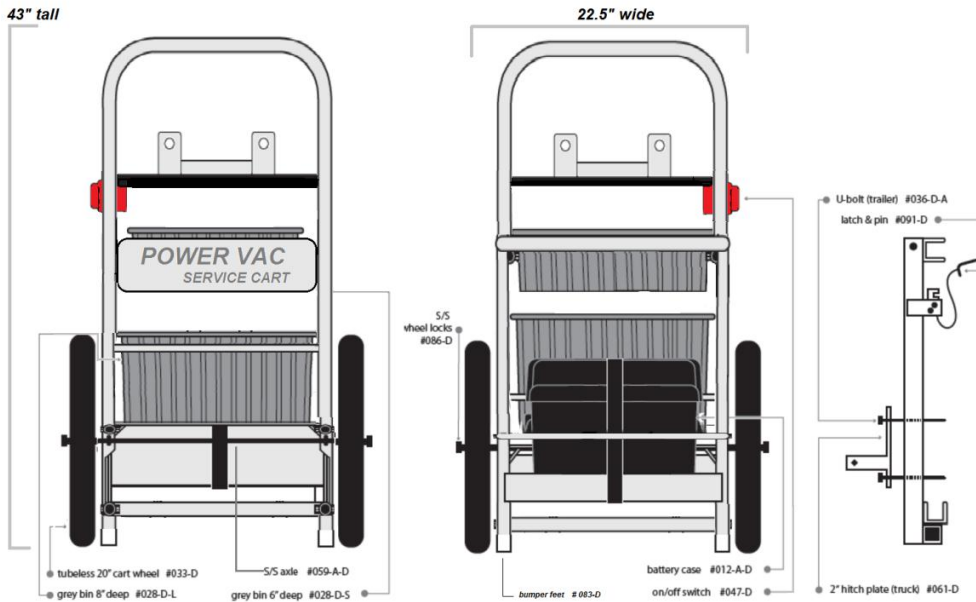

Product Specifications

All Power Vac vacuums and carts are proudly manufactured in America. We also support American vendors by purchasing items within the United States.



- Both the PV2100 & PV2500 have a 6" throat. These vacuums have a 20" x 11" cleaning path and pump approximately 14,000 gallons per hour. Includes a 40' or 60' floating power cord. They are recommended for residential pools and fountains. This vacuum can be portable or on a cart.
- The PV2200 has an 8" throat. This vacuum has a 20" x 11" cleaning path and pumps approximately 16,000 gallons per hour. It also includes a 40' or 60' floating power cord. This vacuum is recommended for residential and commercial use. It is highly recommended that this vacuum be purchased with a large cart (item# 040-D-40 or 040-D-60) as it requires a large battery.
- The PV3000 has an 8" throat. This vacuum has a 40" x 11" cleaning path and pumps approximately 16,000 gallons per hour. Includes a 75' floating power cord. This vacuum is recommended for water parks and resorts. It is highly recommended to be purchased with the mini cart (item# 003000-D-S) as it requires a large battery.
- All vacuums have a 30 pound thrust motor and a custom cut 2-blade, no clog propeller, designed to pick up heavy debris.
- A custom-designed aluminum handle for your telescopic pole comes standard with every vacuum
- A safety lid is on all vacuums, except the PV2500. This important little flap traps debris inside the filter bag once the vacuum shuts off, preventing it from flowing back out. It also protects your hands from the spinning propeller.
- Ergonomic battery case with built-in fuse allows battery to shut off, preventing overheating.
- A charging plug comes standard with all units. This plug attaches to your battery charger for easy charging. See page 4 for installation directions.
- Power Vac filter bags come in a wide variety of sizes & mesh material able to filter anything from rocks and glass to hair and diatomaceous earth.

ITEM #	DESCRIPTION
REPLACEMENT PARTS	
012-A-D	LARGE BATTERY CASE WITH FEMALE PLUG
028-D-S	GREY BIN 6" DEEP
028-D-L	GREY BIN 8" DEEP
033-D	20" TUBELESS TIRE WITH 2 BEARRINGS
036-D	LARGE U-BOLT FOR HITCH PLATE (FOR LOW RIDING VEHICLES)
036-D-A	MEDIUM U-BOLT FOR HITCH PLATE
047-D	MARINE ON/OFF BATTERY SWITCH FOR LG SVC CART W/ WIRING + FEMALE PLUG
049-B-D	WHEEL BEARING FOR 20" TUBELESS TIRE
059-A-D	STAINLESS STEEL AXAL
061-D	2" HITCH PLATE (TRUCK MOUNT)
083-D	NYLON BUMPER FEET
084-12-D	12" BUNGEE STRAP
086-D	S/S WHEEL LOCK NUT (SPLIT COLLAR)
091-D	S/S LOCKING LATCH & PIN

Battery Info

Available at a specialty battery store near you or online.

FOR PORTABLE USE ONLY

BATTERY SPECS: 12V 35AH ABSORBED GLASS MAT (AGM) BATTERY

FITS INSIDE BATTERY CASE ITEM# 012-D SOLD WITH ALL PORTABLE VACUUM PACKAGES (SEE PAGES 13 & 16)

Weight: ~ 27 lbs

Run time approx.: 3 hours (Portable PV2100 & PV2500)

FOR MINI CART ONLY

BATTERY SPECS: DEEP CYCLE 12V 55AH AGM BATTERY W/P TERMINALS

FITS INSIDE BATTERY CASE ITEM# 012-B-D SOLD WITH MINI CART:

ITEM#068-D & 003000-D-S (SEE PAGES 16 & 18)

Weight: ~ 42 lbs

Run time approx.: 4 – 4.5 hours (PV2100 & PV2500 ON CART)

Run time approx.: 2 – 2.5 hours (PV2200 & PV3000 ON CART)

FOR LARGE CART ONLY

BATTERY SPECS: DEEP CYCLE 12V 55AH – 100AH AGM BATTERY W/P TERMINALS

FITS INSIDE BATTERY CASE ITEM# 012-A-D SOLD WITH ALL CARTED VACUUM PACKAGES (SEE PAGES: 13 & 14)

Weight: ~ 74 lbs

Run time approx.: 7.5 – 8 hours (PV2100 ON CART)

Run time approx.: 5 hours (PV2200 ON CART)

WARNING!

BATTERIES CONTAIN SULFURIC ACID WHICH CAN CAUSE SEVERE BURNS. AVOID CONTACT WITH SKIN, EYES, AND CLOTHING. BATTERY ACID PRODUCES HYDROGEN AND OXYGEN GASES WHEN BEING CHARGED. THE EXPLOSIVE GAS ESCAPES THROUGH THE FILL/VENT CELL CAPS AND MAY FORM AN EXPLOSIVE ATMOSPHERE AROUND THE BATTERY IF VENTILATION IS POOR. THIS GAS MAY REMAIN AROUND THE BATTERY FOR SEVERAL HOURS AFTER IT HAS BEEN CHARGED. SPARKS OF FLAMES CAN IGNITE THE GAS AND CAUSE AN EXPLOSION WHICH MAY SHATTER THE BATTERY AND CAUSE BLINDNESS OR OTHER SERIOUS INJURY. ALWAYS CHARGE BATTERIES IN AN OPEN AIR AREA TO LOWER THE RISK OF A FIRE OR EXPLOSION. NEVER CHARGE BATTERY ON A SETTING HIGHER THAN TEN (10) AMPS. IF BATTERY USE REQUIRES WATER CHECK IT BEFORE CHARGING THE BATTERY.

Charger Info

PURCHASE ANY CHARGER WITH AUTOMATIC SHUT OFF

USE A 12V 6 AMP OR 12V 10 AMP CHARGE ONLY


How to calculate charging time:

$$\text{BATTERY AMPERAGE} \div \text{CHARGING AMPERAGE} = \text{CHARGE TIME}$$

Example: $35 \div 6 = 6$ hours

Parts List for PV3000


Resorts & Water Parks

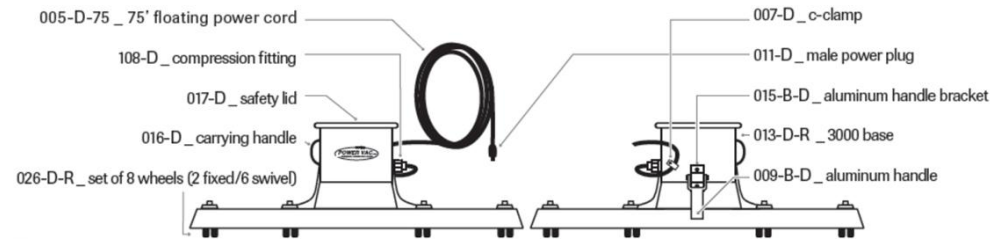

PART #	DESCRIPTION
	ON SITE CARTED VERSION
003000-D-S	PV3000 WITH 75' CORD CARTED VACUUM PACKAGE
	REPLACEMENT PARTS
005-D-75	75' BLUE FLOATING POWER CORD W/ BRASS + MOLDED MALE PLUG (SELF INSTALLATION VOIDS WARRANTY)
006-D-3000	PV2200 REPLACEMENT MOTOR (SELF INSTALLATION VOIDS WARRANTY)
007-D	"C"-CLAMP
009-A-D	CHROME HANDLE WITH DELRON CLIP
009-B-D	ALUMINUM HANDLE
009-C-D	CHROME SWIVEL HANDLE
010-D	FEMALE PLUG
010-B-D	FEMALE PLUG W/ FUSE ATTACHMENT FOR BATTERY CASE
011-D	MALE PLUG (ON END OF POWER CORD)
013-D-R	PV3000 REPLACEMENT BASE-LESS MOTOR & CORD
015-B-D	ALUMINUM HANDLE BRACKET (HORIZONTAL) FOR UNITS PURCHASED BEFORE 2006
016-D	CARRYING HANDLE
017-D	PV2200 & PV3000 SAFETY LID
026-D-R	SET OF 8 CASTER WHEELS (2 FIXED / 6 SWIVEL)
027-D	SINGLE SWIVEL CASTER WHEEL
027-D-A	SINGLE FIXED WHEEL
029-D	NUT & PIN FOR PROP
030-D-2200	TWIN BLADE PROPELLER (PROP) FOR PV2200
058-D	BRASS NUT FOR MOTOR
081-D	ORANGE CORD SEAL GROMET
092-D	SINGLE PV FEMALE CONNECTOR FOR MOTOR
093-D	SINGLE PV MALE CONNECTOR FOR POWER CORD
108-D	BRASS COMPRESSION BELL FOR FLOATING POWER CORD
	FILTER BAGS
019-D-2200	26" SUPER FINE MESH FILTER BAG
020-D-2200	26" MICRON FILTER BAG
022-D-2200	26" HEAVY DUTY MESH FILTER BAG
022-D-2200L	42" HEAVY DUTY MESH FILTER BAG
023-D-2200	26" SCREEN MESH FILTER BAG
023-D-2200L	42" SCREEN MESH FILTER BAG

Parts List for PV2500


Fountains & Residential Pools

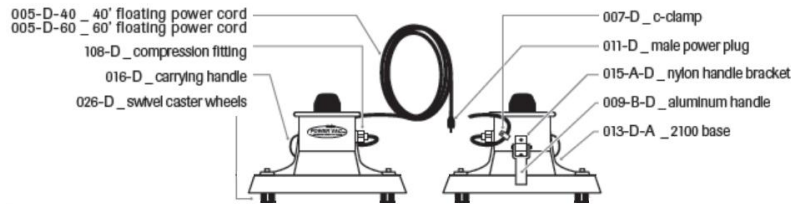

PART #	DESCRIPTION
PORTABLE VERSIONS	
003-D-40	PV2500 WITH 40' CORD PORTABLE VACUUM PACKAGE
003-D-60	PV2500 WITH 60' CORD PORTABLE VACUUM PACKAGE
REPLACEMENT PARTS	
004-D	CORD FLOAT (FOR NON-FLOATING CORD-PURCHASED BEFORE 2010)
005-D-40	40' BLUE FLOATING POWER CORD W/ BRASS + MOLDED MALE PLUG (SELF INSTALLATION VOIDS WARRANTY)
005-D-60	60' BLUE FLOATING POWER CORD W/ BRASS + MOLDED MALE PLUG (SELF INSTALLATION VOIDS WARRANTY)
006-D-2500	PV2500 MOTOR (SELF INSTALLATION VOIDS WARRANTY)
007-D	"C"-CLAMP
009-A-D	CHROME HANDLE WITH DELRON CLIP
009-B-D	ALUMINUM HANDLE
009-C-D	CHROME SWIVEL HANDLE
010-D	FEMALE PLUG
010-B-D	FEMALE PLUG W/ FUSE ATTACHMENT FOR BATTERY CASE
011-D	MALE PLUG (ON END OF POWER CORD)
012-D	PORTABLE BATTERY CARRYING CASE W/ BUILT IN FUSE
013-D-F	PV2500 REPLACEMENT BASE-LESS MOTOR & CORD
013-D-F-S	PV2500 REPLACEMENT BASE-BARE SHELL ONLY
015-A-D	NYLON HANDLE BRACKET (VERTICAL)
015-B-D	ALUMINUM HANDLE BRACKET (HORIZONTAL) FOR UNITS PURCHASED BEFORE 2006
016-D	CARRYING HANDLE
026-D	SET OF 4 CASTER WHEELS
027-D	SINGLE SWIVEL CASTER WHEEL
027-D-A	SINGLE FIXED WHEEL
029-D	NUT & PIN FOR PROP
030-D-2500	TWIN BLADE PROPELLER (PROP) FOR PV2500
058-D	BRASS NUT FOR MOTOR
081-D	ORANGE CORD SEAL GROMET
085-D	STEERING KIT (2 FIXED/2 SWIVEL WHEELS & CHROME SWIVEL HANDLE)
092-D	SINGLE PV FEMALE CONNECTOR FOR MOTOR
093-D	SINGLE PV MALE CONNECTOR FOR POWER CORD
108-D	BRASS COMPRESSION BELL FOR FLOATING POWER CORD
FILTER BAGS	
019-D-2100	26" SUPER FINE MESH FILTER BAG
019-D-2500	15" SUPER FINE MESH FILTER BAG
020-D-2100	26" MICRON FILTER BAG
022-D-2100	26" HEAVY DUTY MESH FILTER BAG
022-D-2100L	42" HEAVY DUTY MESH FILTER BAG
022-D-2500	15" HEAVY DUTY MESH FILTER BAG
023-D-2100	26" SCREEN MESH FILTER BAG
023-D-2100L	42" SCREEN MESH FILTER BAG

Install Your Battery

1. Place your 12 volt battery inside the battery carrying case (this may have come with your vacuum purchase).
2. Take the plug wires-connect the red [+] to the positive [+] post of the battery.
3. Connect the black [-] wire to the negative [-] post of the battery.

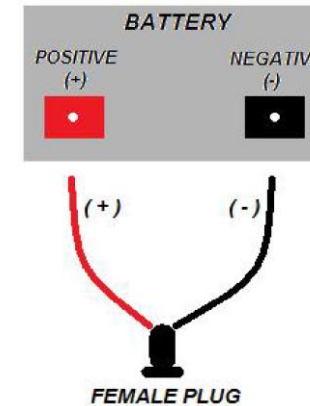

Installing the Charge Plug

FIG. 1



FIG. 2




This plug is included in with the purchase of a new vacuum. Here is how to charge your battery hassle-free, without taking the lid off the battery case. Installing the charge plug is optional.

1. Cut the clamp ends off of your charger.
2. Strip back the wires exposing about 1". See fig. 1.
3. Connect the positive [+] wire of the charger to the positive [+] wire of the charge plug. Do the same for the negative [-] black wire. Clamp the wires into the butt connector. See Fig 2.
4. Apply heat to the butt connectors until it shrinks slightly and adheres to the wires.

Assemble Your Filter Bags

Instructions

1. Feed bungee cord thru one opening of top seam.
2. Push bungee all the way thru, until both rubber ends are exposed.
3. Take both ends of bungee and line them up evenly.
4. Measure 1 inch below rubber ends and use black zip tie to bring two ends together.
5. Pull zip tie as tight as possible then cut away the excess zip tie.
6. Turn bag inside out (seam goes on inside).

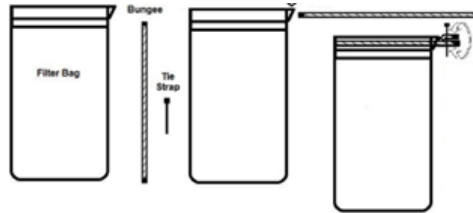

Once assembled, slip filter bag over top opening of vacuum. The bag will collect debris from water as vacuum operates. Empty the filter bag of all debris when it becomes full. With standard use and proper care, these bags generally need to be replaced every 3-4 months.

Power Vac Filter Bags



All filter bags are available in various sizes. See Pages 13-18 for item numbers.


Recommended debris pick up for filter bags.

→Debris→	Leaves	Twigs	Glass	Rocks	Algae	Sand	Fine Sand	Hair	Diatomaceous Earth
↓Filter Bag↓									
Screen	•	•		•	•				
Heavy Duty	•	•	•	•		•			
Super Fine*	•	•				•	•	•	
Micron*						•	•	•	•

*Avoid picking up sharp objects as it can damage the mesh fabric.

Parts List for PV2200

Commercial Pools
Only Sold With Cart

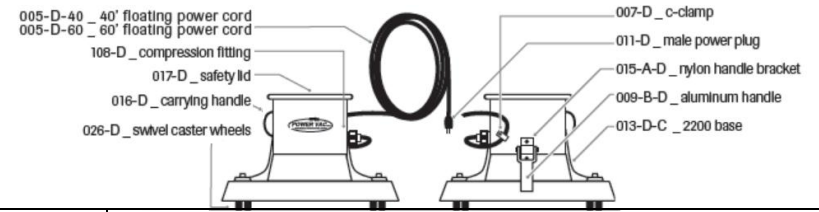


PART #	DESCRIPTION
MOUNTABLE CARTED VERSIONS	
040-D-40	PV2200 WITH 40' CORD CARTED VACUUM PACKAGE WITH TRUCK MOUNT
040-60-D	PV2200 WITH 60' CORD CARTED VACUUM PACKAGE WITH TRUCK MOUNT
ON SITE CARTED VERSIONS	
040-40-A-D	PV2200 WITH 40' CORD CARTED VACUUM PACKAGE
040-60-A-D	PV2200 WITH 60' CORD CARTED VACUUM PACKAGE
REPLACEMENT PARTS	
004-D	CORD FLOAT (FOR NON-FLOATING CORD-PURCHASED BEFORE 2010)
005-D-40	40' BLUE FLOATING POWER CORD W/ BRASS + MOLDED MALE PLUG (SELF INSTALLATION VOIDS WARRANTY)
005-D-60	60' BLUE FLOATING POWER CORD W/ BRASS + MOLDED MALE PLUG (SELF INSTALLATION VOIDS WARRANTY)
006-D-2200	PV2200 REPLACEMENT MOTOR (SELF INSTALLATION VOIDS WARRANTY)
007-D	"C"-CLAMP
009-A-D	CHROME HANDLE WITH DELRON CLIP
009-B-D	ALUMINUM HANDLE
009-C-D	CHROME SWIVEL HANDLE
010-D	FEMALE PLUG
010-B-D	FEMALE PLUG W/ FUSE ATTACHMENT FOR BATTERY CASE
011-D	MALE PLUG (ON END OF POWER CORD)
013-D-C	PV2200 REPLACEMENT BASE-LESS MOTOR & CORD
013-D-C-S	PV2200 REPLACEMENT BASE-BARE SHELL ONLY
015-A-D	NYLON HANDLE BRACKET (VERTICAL)
015-B-D	ALUMINUM HANDLE BRACKET (HORIZONTAL) FOR UNITS PURCHASED BEFORE 2006
016-D	CARRYING HANDLE
017-D	PV2200 & PV3000 SAFETY LID
026-D	SET OF 4 CASTER WHEELS
027-D	SINGLE SWIVEL CASTER WHEEL
027-D-A	SINGLE FIXED WHEEL
029-D	NUT & PIN FOR PROP
030-D-2200	TWIN BLADE PROPELLER (PROP) FOR PV2200
058-D	BRASS NUT FOR MOTOR
081-D	ORANGE CORD SEAL GROMET
085-D	STEERING KIT (2 FIXED/2 SWIVEL WHEELS & CHROME SWIVEL HANDLE)
092-D	SINGLE PV FEMALE CONNECTOR FOR MOTOR
093-D	SINGLE PV MALE CONNECTOR FOR POWER CORD
108-D	BRASS COMPRESSION BELL FOR FLOATING POWER CORD
FILTER BAGS	
019-D-2200	26" SUPER FINE MESH FILTER BAG
020-D-2200	26" MICRON FILTER BAG
022-D-2200	26" HEAVY DUTY MESH FILTER BAG
022-D-2200L	42" HEAVY DUTY MESH FILTER BAG
023-D-2200	26" SCREEN MESH FILTER BAG
023-D-2200L	42" SCREEN MESH FILTER BAG

Parts List for PV2100

Equipment Maintenance

Residential & Commercial Pools

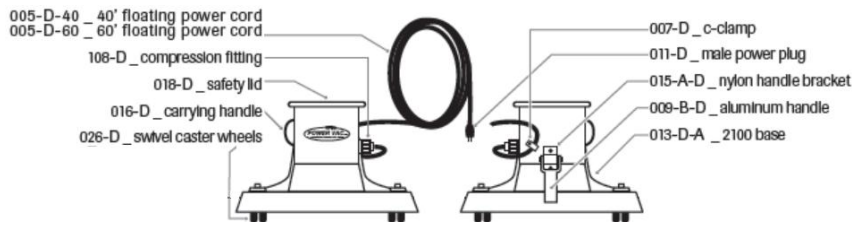

PART #	DESCRIPTION
PORTABLE VERSIONS	
002-D-40	PV2100 WITH 40' CORD PORTABLE VACUUM PACKAGE
002-D-60	PV2100 WITH 60' CORD PORTABLE VACUUM PACKAGE
MOUNTABLE CARTED VERSIONS	
039-D-40	PV2100 WITH 40' CORD CARTED VACUUM PACKAGE WITH TRUCK MOUNT
039-D-60	PV2100 WITH 60' CORD CARTED VACUUM PACKAGE WITH TRUCK MOUNT
ON SITE CARTED VERSIONS	
039-40-A-D	PV2100 WITH 40' CORD CARTED VACUUM PACKAGE
039-60-A-D	PV2100 WITH 60' CORD CARTED VACUUM PACKAGE
REPLACEMENT PARTS	
004-D	CORD FLOAT (FOR NON-FLOATING CORD-PURCHASED BEFORE 2010)
005-D-40	40' BLUE FLOATING POWER CORD W/ BRASS + MOLDED MALE PLUG (SELF INSTALLATION VOIDS WARRANTY)
005-D-60	60' BLUE FLOATING POWER CORD W/ BRASS + MOLDED MALE PLUG (SELF INSTALLATION VOIDS WARRANTY)
006-D-2100	PV2100 MOTOR (SELF INSTALLATION VOIDS WARRANTY)
007-D	"C"-CLAMP
009-A-D	CHROME HANDLE WITH DELRON CLIP
009-B-D	ALUMINUM HANDLE
009-C-D	CHROME SWIVEL HANDLE
010-D	FEMALE PLUG
010-B-D	FEMALE PLUG W/ FUSE ATTACHMENT FOR BATTERY CASE
011-D	MALE PLUG (ON END OF POWER CORD)
012-D	PORTABLE BATTERY CARRYING CASE W/ BUILT IN FUSE
013-D-A	PV2100 REPLACEMENT BASE-LESS MOTOR & CORD
013-D-A-S	PV2100 REPLACEMENT BASE-BARE SHELL ONLY
015-A-D	NYLON HANDLE BRACKET (VERTICAL)
015-B-D	ALUMINUM HANDLE BRACKET (HORIZONTAL) FOR UNITS PURCHASED BEFORE 2006
016-D	CARRYING HANDLE
018-D	PV2100 SAFETY LID
026-D	SET OF 4 CASTER WHEELS
027-D	SINGLE SWIVEL CASTER WHEEL
027-D-A	SINGLE FIXED WHEEL
029-D	NUT & PIN FOR PROP
030-D-2100	TWIN BLADE PROPELLER (PROP) FOR PV2100
058-D	BRASS NUT FOR MOTOR
081-D	ORANGE CORD SEAL GROMET
085-D	STEERING KIT (2 FIXED/2 SWIVEL WHEELS & CHROME SWIVEL HANDLE)
092-D	SINGLE PV FEMALE CONNECTOR FOR MOTOR
093-D	SINGLE PV MALE CONNECTOR FOR POWER CORD
108-D	BRASS COMPRESSION BELL FOR FLOATING POWER CORD
FILTER BAGS	
019-D-2100	26" SUPER FINE MESH FILTER BAG
020-D-2100	26" MICRON FILTER BAG
022-D-2100	26" HEAVY DUTY MESH FILTER BAG
022-D-2100L	42" HEAVY DUTY MESH FILTER BAG
023-D-2100	26" SCREEN MESH FILTER BAG
023-D-2100L	42" SCREEN MESH FILTER BAG

Important tips on keeping your vacuum in top shape:

1. CLEAN PROPELLER (PROP) REGULARLY. UNPLUG THE VACUUM!

Unscrew the nut (see fig 1) and clear prop of any debris (see fig 2). If removing the pin inserted between the motor shaft make sure to replace it immediately. When screwing the nut back on to prop do not over tighten.

Failure to regularly clean prop may cause motor to lock up. In some cases the debris will make its way down into the motor armature.

Do not put fingers near prop while motor is running! Serious injury may occur.



Figure 1



Figure 2

2. WRAP POWER CORD PROPERLY AFTER EVERY USE (see Fig 3).

Keep power cord in good condition and free of kinks, to ensure optimal performance. Allowing your power cord to knot and kink may result in one or more areas on cord where power shortages occur.



Figure 3

3. DO NOT RUN THE VACUUM OUT OF WATER FOR MORE THAN 20 SECONDS.

Our motors are designed to operate under water. Running the motor while out of water may cause motor to overheat.

Purchasing Replacement Parts

4. **DO NOT PICK THE VACUUM UP BY THE CORD.** Use the white carrying handle on the side. Pulling on the power cord or picking vacuum up by power cord can jeopardize the water tight seals installed on cord and motor. When a leak occurs, the motor can cease from water damage.

5. **KEEP CHARGING POST FREE OF CORROSION.** Properly caring for your battery will extend its life. Make sure to charge it daily.

6. **IF YOU NOTICE A SIGNIFICANT DIFFERENCE IN PERFORMANCE OR APPEARANCE, IT IS HIGHLY RECOMMENDED TO REPLACE YOUR PARTS.** It is important to keep your male and female plugs in top operating condition.

For your convenience all parts on your Power Vac equipment are replaceable. This will allow you to keep your vacuum in top working condition. It is recommended to replace all parts as needed for general maintenance to ensure your equipment's performance and longevity. For a full list of parts see pages 13-18

POWER VAC CORPORATION DOES NOT SELL TO THE PUBLIC.

PLEASE VISIT OUR WEB SITE FOR A LIST OF DISTRIBUTORS TO PURCHASE FROM.



PV3000 with Mini Cart [item# 003000-D-S (see pg. 16)]
Recommended for resorts and water parks.



Caring For Your Service Cart


1. Grease wheel bearings at least once a month using an industrial lubricant.
2. Rinse down cart at the end of every day. This will help prevent chemical erosion.
3. Look over all bolts to make sure they are screwed in tightly.
4. Store in a dry place out of the sun at the end of the day.
5. Check battery once a month for any acid leaks.
6. Look over male and female plug frequently for any sign of damage. Replace if needed.



PV2100 Carted Vacuum Package
Item# 039-D-40 (See pg 13)

Male & Female Plug Installation

PLUG REPLACEMENT INSTRUCTIONS (MALE PLUG)

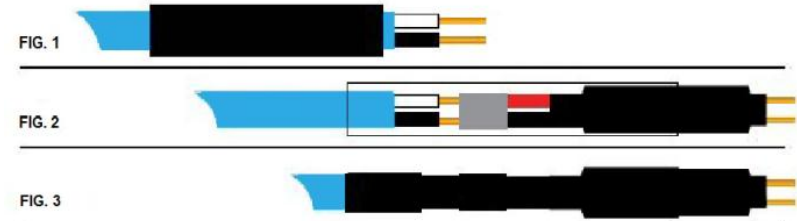


STEP 1. CUT AWAY OLD PLUG AND STRIP BACK POWER CORD, EXPOSING THE WIRES ABOUT ONE INCH (FIG.1)

STEP 2. CONNECT THE WIRES OF YOUR NEW PLUG TO THE WIRES OF YOUR POWER CORD. CLAMP DOWN ON WIRE CONNECTORS (FIG.2)

STEP 3. SLIP PIECE OF BLACK HEAT SHRINK TUBE OVER EXPOSED WIRE CONNECTIONS, POSITIONING ABOUT TWO INCHES DOWN FROM THE TIP OF THE PLUG. APPLY HEAT TO SHRINK TUBE UNTIL IT LOOKS LIKE FIG. 3, OR UNTIL ADHESIVE SEEPS SLIGHTLY OUT OF THE SIDES OF THE TUBE.

PORTABLE BATTERY CARRYING CASE OUTLET REPLACEMENT INSTRUCTIONS (FEMALE PLUG)

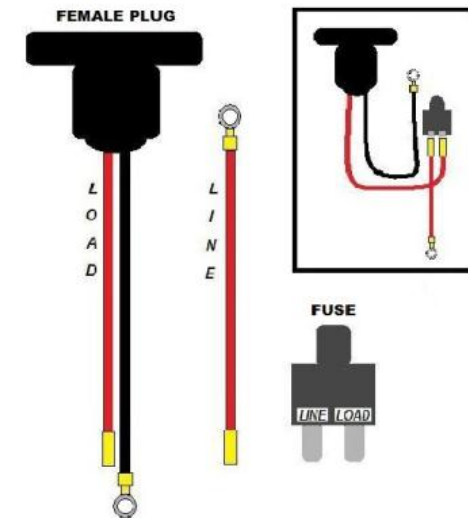

**STEP 1. PLUG BOTH RED WIRES INTO FUSE.
LOAD TO LOAD / LINE TO LINE**

**STEP 2. CONNECT BOTH RING TERMINALS TO BATTERY
RED[+] TO RED[+] / BLACK[-] TO BLACK[-]**

Troubleshooting

1. My vacuum turns on but my propeller will not spin.

- **UNPLUG YOUR VACUUM!** Unscrew the prop nut on the propeller, remove prop and clear any debris that may be wrapped around the motor shaft. This may be causing the motor to lock up.

2. The power goes on and off when I wiggle the plug in the battery outlet.

- Inspect the plug on your power cord. Is it in good condition? Good condition = no corrosion or burnt spots. With repeated use this plug can get worn out and cause power shortages to your vacuum. If your power cord plug is damaged in any way, it is recommended that you replace it.

3. My vacuum will not run.

- Make sure battery is charged and cord is plugged in all the way.
- Has the fuse/breaker in your battery box popped? If so then press it in to reset.

Follow the directions in step 1 & 2.

- Inspect battery connectors for corrosion.
- If you have been picking up the vacuum by its cord, and not the provided carrying handle, the water tight seals inside the cord and motor are most likely taking on water. When this happens corrosion begins and the motor or cord can fail. At this point you will need to replace the damaged parts.

Tech Support Help Line:

877-771-6970

PRESS "2"

Open Monday – Friday

8:00 am – 4:00 pm EST

E-mail: TechSupport@PowerVacCorporation.com

We Provide Repair Services

Power Vac provides an excellent repair service. We offer a turnaround time of 48 hours or less. No RMA's required. Just visit our website to fill out the **Repair Return Form**. Make sure to print it out and place the form inside with your vacuum then mail it to our factory (address is on form). Power Vac is not responsible for shipping charges which require the product to get to our factory. When the package is received a technician will contact you to discuss the needed repairs.

Keep in mind that Power Vac cannot warranty do-it-yourself installations. To receive a warranty on a motor or cord it will have to be installed by a certified Power Vac technician.

If your vacuum is still under warranty you will not be charged for repairs done to your motor, cord or shell. Power Vac will also pay to have the vacuum shipped back to you.

Warranty Info

All Power Vac vacuums come with a (1) year warranty on the shell, cord & motor (as seen below). WARRANTIES ARE ONLY VALID WITH A PROOF OF PURCHASE (i.e.: invoice or sales order). This warranty does not cover product damage due to abuse, excessive wear or damage due to the owner not providing the necessary care (i.e.: a tangled mess of a power cord which is shorting out due to improper wrapping).

All return merchandise for credit (no older than 30 days from proof of purchase) will be subject to inspection and be charged an 18% restocking fee. Power Vac will not be responsible for return shipping charges.



A warranty card is included with the purchase of a new vacuum. Please fill it out and return in a timely manner.