



# VGBA-2017 PRODUCT SPECIFICATIONS

## Suction Outlet Fitting Assembly (SOFA)

VGBA-2017 Flow Ratings, Sump Dimensions, Sump Flow Path Zone, and Head Loss Curves




Certified to  
NSF/ANSI/CAN 50  
ANSI/APSP/ICC 16 - 2017

**DIRECTIONS:** Please follow the SOFA specific flow rates, sump specifications, and flow path zone information below. The installation must conform to these minimum/maximum requirements including the SOFA dimension defined in Figure 1. The flow path zone is defined by dimensions A through E. Please write the Cover Model Number, orientation, and SOFA Model Flow Rating on the *VGBA DRAIN COVER IDENTIFICATION INFORMATION* label that comes with each AquaStar Pool Products, Inc. drain cover.


**Cover Model Number:**  
32CDLTVxxx



**FIGURE 1 – SOFA MODEL & FLOW PATH**

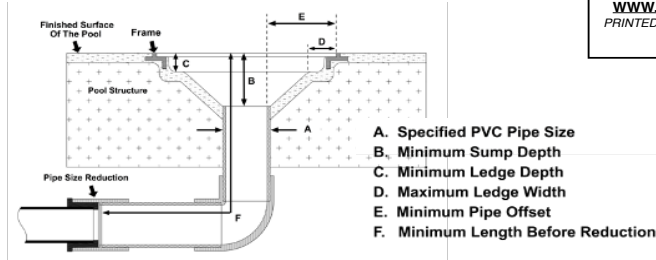

FOR MOST CURRENT INFORMATION  
SCAN THE QR CODE OR VISIT  
[WWW.AQUASTARPOOLPRODUCTS.COM/FLOWCODE](http://WWW.AQUASTARPOOLPRODUCTS.COM/FLOWCODE)  
PRINTED DOCUMENTS MAY NOT HAVE THE MOST CURRENT FLOW RATINGS OR INSTALLATION OPTIONS.



SOFA Model No.	Pipe Size (Nominal)	Pipe Depth (Minimum)	Orientation (Wall / Floor)	Flow Rating (GPM)	Head Loss Curve
32CDLTV-32f_A-2.5x2b_B2.98_C.95_D.2_E.475_F16	2.5" x 2 (b)	2.98"	Floor (f)	100	A

Note 1: "SOFA Model No" nomenclature; bottom pipe = (b), side pipe = (s). See Fig 1 for capital letters A through E

Note 2: Head loss inHg is measured 16 to 24 inches from the finish surface of the pool. Reference Fig 1 dimension F.

Note 3: THE COVER MODEL 32CDLTVxxx IS ONLY AUTHORIZED FOR USE WITH AQUASTAR MANUFACTURED 3-PORT SUMPS. USE WITH FIELD-BUILT SUMPS IS NOT AUTHORIZED.

