
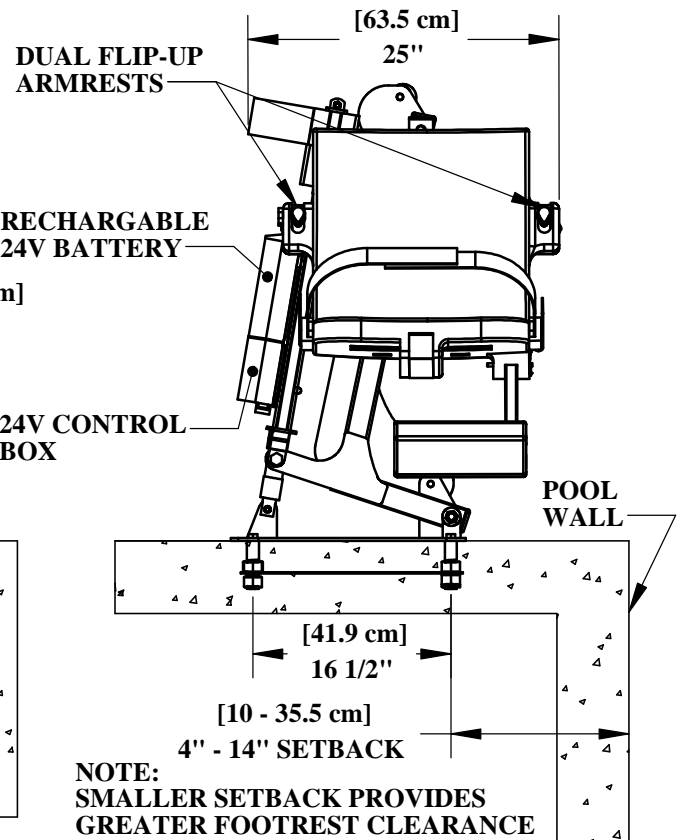


PRO POOL™ LIFT

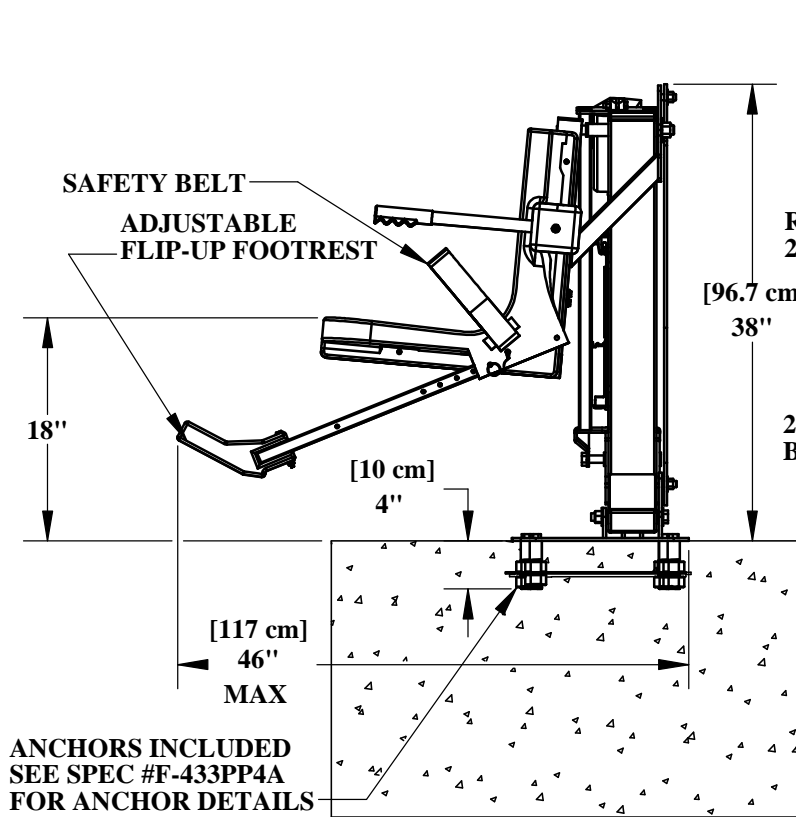

SIDE VIEW

FRONT VIEW

SPECIFICATIONS

THE AQUA CREEK PRO POOL LIFT SHALL BE A 24V LINEAR ACTUATED, SELF OPERABLE, IN-GROUND POOL OR SPA LIFT. THE LIFT SHALL NOT INTRUDE INTO THE POOL OR SPA UNLESS IN USE. THE LIFT SHALL BE OF STAINLESS STEEL CONSTRUCTION AND DESIGNED TO LIFT 450 LBS [204 kg] WITH A STATIC LOAD RATING OF 675 LBS [306 kg]. AN 18" [45.7 cm] WIDE SEAT SHALL BE CAPABLE OF BEING SET BACK 16" [405 mm] FROM CENTERLINE OF SEAT TO POOL EDGE. A 24 VOLT WATERPROOF CONTROLLER SHALL BE USABLE BY THE OPERATOR OR AN ATTENDANT. A CONTROL BOX, BATTERY CHARGER AND ONE REMOVABLE 24V RECHARGABLE BATTERY SHALL COME STANDARD. THE LIFT SHALL INCLUDE A SEATBELT. THE LIFT SHALL CARRY A LIMITED LIFETIME WARRANTY.

BASE PLATE: 1/4" STAINLESS STEEL TYPE 304
 MAIN HOUSING: 2" x 4" x .120" STAINLESS STEEL TUBE TYPE 304
 CHAIR AND FOOTREST: UV STABILIZED POLYETHYLENE (LLDPE)
 ACTUATOR: 24" STROKE LINAK LA34 LINEAR ACTUATOR
 FINISH: UV RESISTANT EPOXY POWDER COATING


Inspected And Verified To Meet
 Applicable Sections of ADA
 Guidelines Section 1009.2 By

wyle
 laboratories

A Nationally Recognized
 Test Laboratory



CERTIFIED

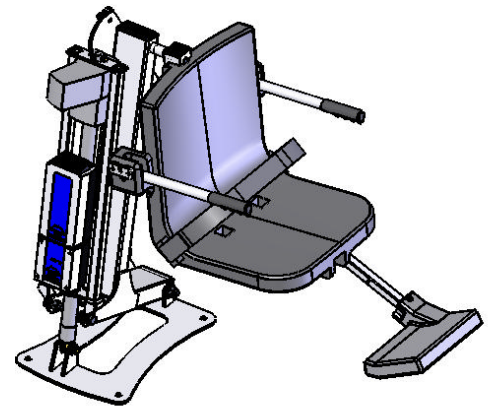


9889 GARRYMORE LANE
 MISSOULA, MT 59808
 (406) 549-0769
 FAX (406) 549-2602

NOTE:
 *SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE
 *ALL DIMENSIONS ARE IN INCHES


Aqua Creek Products
 The Total Solution for Pool and Spa Access

PRODUCT:	F-004PLB		
DWG #:	F-004PLB-1		
SCALE:	1:18	DATE:	11/18/10
DRAWN BY:	DS	REVISION:	M

PRO POOL™ LIFT

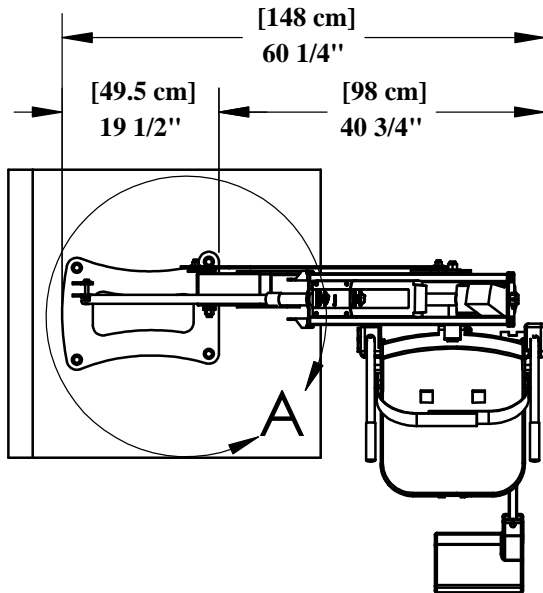


TOP VIEW

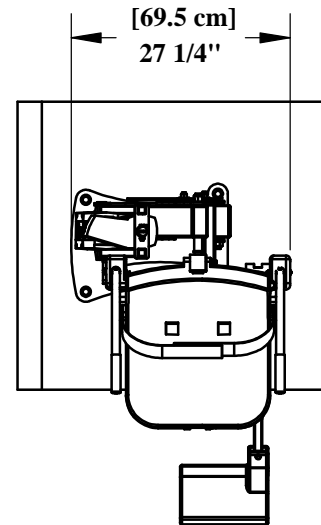


**LIFT SHOWN IN FULLY
RAISED POSITION**

TOP VIEW

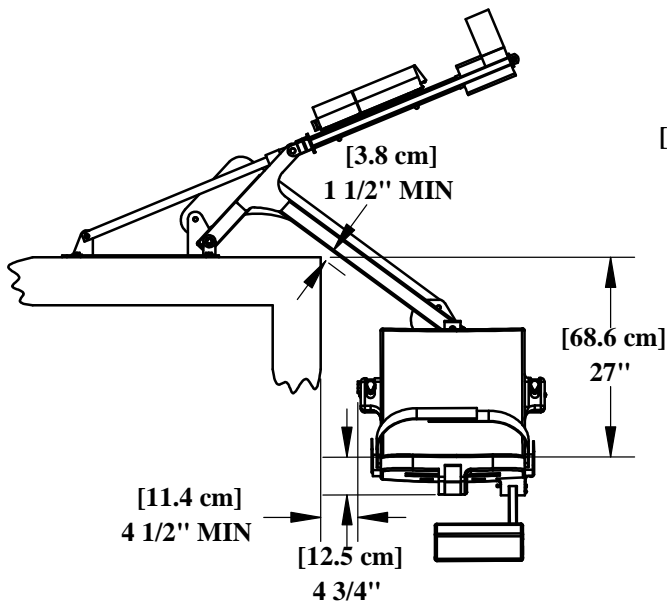

**LIFT SHOWN IN FULLY
LOWERED POSITION**

FRONT VIEW

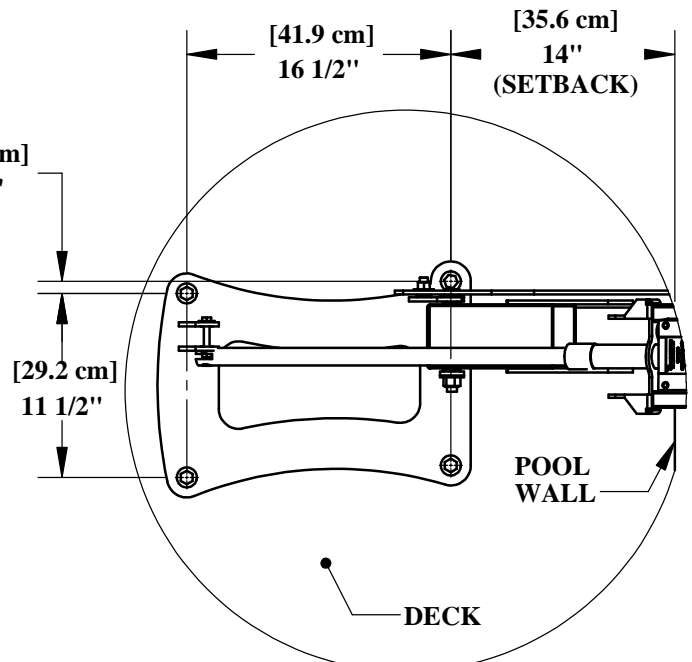

**DETAIL A
SCALE 1 : 12**

ANCHOR BOLT PATTERN

PRODUCT:	F-004PLB	
DWG #:	F-004PLB-2	
SCALE:	1:24	DATE: 11/18/10
DRAWN BY:	DS	REVISION: M