

**FX | LUMINAIRE®**  
**DL-10, DL-15, DL-20**



**DEMILITE® | FX LUMINAIRE®**

**INVESTMENT QUALITY  
 LIGHTING INSTRUMENT**

Milled from extra heavy gauge copper and brass this petite luminaire is engineered to survive. Whether you're specifying for a resort in Carmel or a backyard in Dallas, the simple geometry of the patent pending DemiLite blends into the environment effortlessly.

The beam spread of the DL provides maximum projection with minimum glare, thereby producing a soft glare-free light up to 28' in diameter!


This model is perfect for coastal exposures or areas where irrigation water contains high levels of mineral or caustic salts.

The copper will patina naturally over time and can be accelerated with solution spray. For patina formulas visit our website at: [www.FXL.com/learning/patina.htm](http://www.FXL.com/learning/patina.htm)




**THE TIMELESS BEAUTY  
 OF COPPER**

*When engineering a new powdercoat finish at FX we strive to make it appear organic so it blends into the surrounding environment. No powdercoat will ever look as natural as copper since it does not develop an uneven mottled finish that consists of the full spectrum of earthtones. Although we ship the copper pathlites in a bright condition they will quickly tarnish to a penny brown, moss-green brown or a blue-green (by the ocean).*

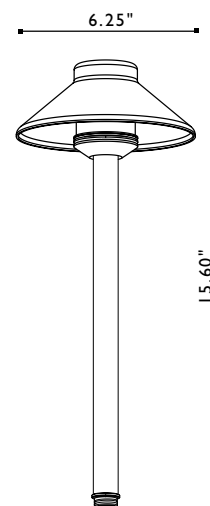

**PERIMETER  
 LIGHTING**



# DEMI<sup>®</sup>LITE – ORDERING INFORMATION


The DL comes standard with a 20 watt Xenon G4 lamp, CapannaDiNoce<sup>®</sup> (CDS), and in Copper (CU).

## STANDARD OPTIONS:

1 + 2 + 3 + 4 ORDERED TOGETHER ON SAME LINE

## AVAILABLE LAMP CONFIGURATIONS:


Your choice of one lamp will come pre-installed.

FIXTURE/CODE	WATTAGE/CODE	AVG. LIFE HOUR
<b>1</b> 	<b>2 XENON LAMP OPTIONS:</b>	
	10	10,000
	15	10,000
	20	5000
	<b>HALOGEN (H) LAMP OPTIONS:</b>	
	10H	2000
	20H	2000

## STANDARD RISER OPTIONS:


Your choice of one riser option will come pre-assembled.

Riser Specs: Copper 0.75" Diameter

	CODE	DESCRIPTION
	<b>3</b>	
	8R	8" Riser
	12R	12" Riser
	18R	18" Riser


## STANDARD FINISH OPTIONS:

Copper is standard. All other choices must be specified.

	CODE	DESCRIPTION
	CU	Copper (will naturally patina)

## NON-STOCKING FINISH OPTIONS:

Allow extra time for the following finish options:

	CODE	DESCRIPTION
	<b>4</b>	
	BZ	Bronze Metallic
	DG	Desert Granite
	BF	Black Wrinkle
	VF	Verde Speckle
	SB	Sedona Brown
	WF	White Wrinkle
	WI	Weathered Iron
	NP	Nickel Plate

## STANDARD PARTS:



## ORDERING SAMPLE:

SECTIONS:	DESCRIPTION:	WHAT TO ORDER:
1 + 2 + 3 + 4 <small>optional</small>	 +  +  + 	= DL-20-12R
A	PostMount <sup>®</sup>	= PM


## NON-STANDARD OPTIONS:

MUST BE ORDERED ON SEPARATE LINE!

## ADDITIONAL MOUNTING OPTIONS:

Comes pre-assembled with CapannaDiNoce<sup>®</sup>.

All other mounting options will arrive in separate box.

	CODE	DESCRIPTION	SIZE
	<b>A</b>		
	SJ	SuperJ-boX <sup>®</sup>	2.50" x 12.00"
	PM	PostMount <sup>®</sup>	2.50" x 13.00"

## PHOTOMETRICS:

Spacing for minimum footcandle illumination on level ground.  
 Note: 1fc for commercial projects  
 .3fc for residential projects

DL-10 6' for 1fc, 11' for .3fc  
 DL-20 10' for 1fc, 15' for .3fc

Distance	Footcandle Power (12R riser)	
	DL-10	DL-20
14'		
12'	2'	3
10'	4'	.88
	6'	.33
8'	8'	.14
	10'	.08
6'	12'	.03
	4'	.01
2'		

For conversion to lumens: Multiply footcandles × 10. See FX glossary for a full description of fc and lumens.